


ACTION PLAN FOR INDUSTRIAL CLUSTER IN CRITICALLY POLLUTED AREA

**Monitoring, sampling, analysis of Stack,
Ambient Air Quality, Surface Water,
Ground Water, Waste Water**

डोंबीवली Dombivli

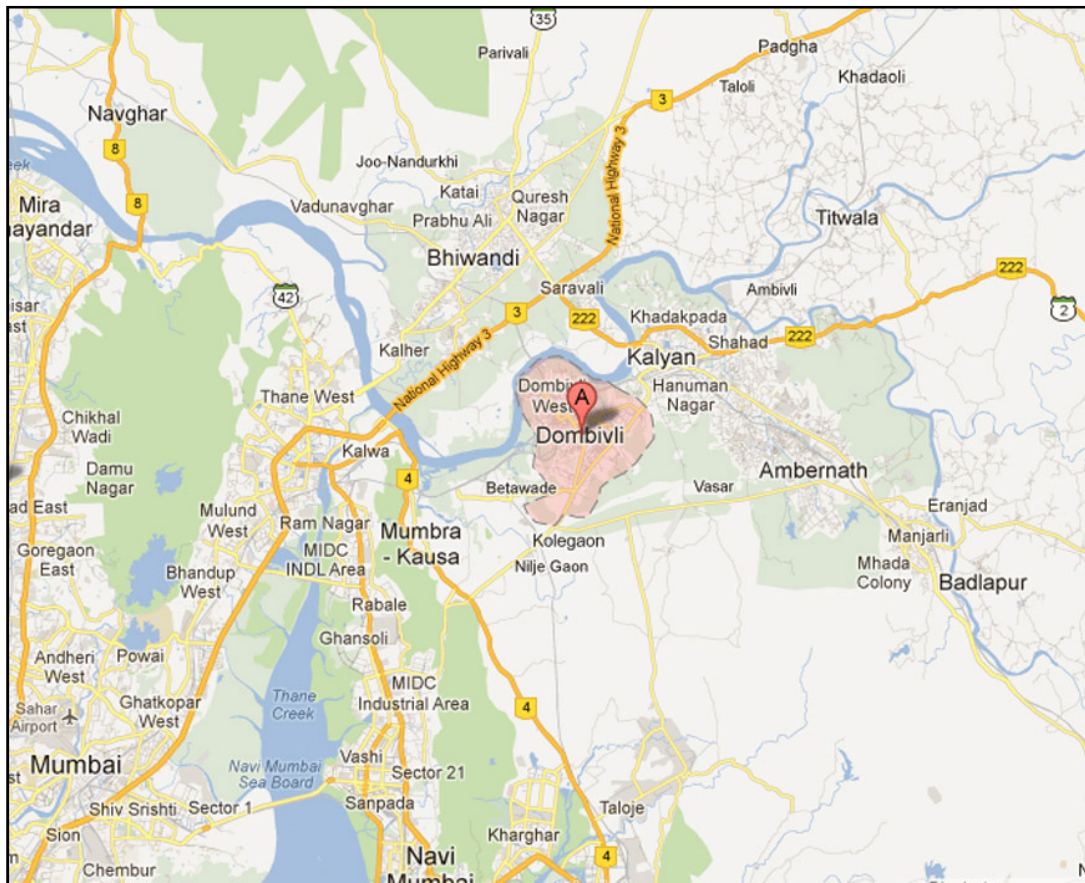

Maharashtra Pollution Control Board

Kalptaru Point, Sion East, Mumbai - 400022

February, 2017

Index

Acknowledgement:	3
Abbreviations:	4
1. Introduction:	5
2. Scope of Work	5
2.1 Stack Emission Parameters.....	6
2.2 Ambient Air Quality Parameters	7
2.3 Water/Waste Water Parameters	7
2.4 Methodology followed in Sampling and Analysis	10
3. Result of Analysis:	10
3.1 Stack Emission:	11
3.2 Ambient Air Quality:	15
3.3 Water/ Waste Water Quality:	22
3.4 Ground Water Quality:	43
4. Summary of the results	54
4.1 Stack Emission Monitoring:.....	54
4.2 Ambient Air Quality Monitoring:	54
4.3 Waste Water Quality Monitoring:.....	55
4.3 Ground Water Quality Monitoring:	56
5. CEPI Score	57
5.1 Comparison of CEPI scores:	58
6. Conclusion	60
7. Efforts taken for the reduction in pollution:	61
8. Photographs	62
9. References	70
10. Annexure	71
Annexure I: Stack Emission Sampling and Analysis Methodology	71
Annexure II: Ambient Air Sampling and Analysis Methodology	73
Annexure III: Water/Wastewater Sampling and Analysis Methodology.....	75
Annexure IV: National Ambient Air Quality Standards, 2009	79
Annexure V: General Standards for Discharge of Environmental Pollutants, Part A: Effluents (The Environment (Protection) Rules, 1986, Schedule VI).....	80
Annexure VI: Drinking Water Specification-IS 10500:2012	84
Annexure VII: CPCB Water Quality Criteria:	88
Annexure VIII: Water Quality Parameters Requirements and Classification	89

Acknowledgement:

We gratefully acknowledge **Dr. P. Anbalagan**, Member Secretary, Maharashtra Pollution Control Board, for entrusting this very important and prestigious project to us.

Our special thanks are to Regional and Sub Regional Officer of the concerned areas, for guidance during the sampling. The contribution of Shri V M Motghare (Joint director APC) is appreciated.

By undertaking this project and completing in schedule time, we consider ourselves very lucky since we have helped the mankind by giving the data on pollution load and further action by the Board, to bring down the pollution level.

We also thank our associates for working on this project for making the write up, making graphs and feeding the data on computer.

This acknowledgement will be incomplete if we do not thank our laboratory analysts and others who made this project a success by timely analysing the samples.

We also thank our sampling team members for conducting the sampling in this vast area.

Abbreviations:

APHA	American Public Health Association
BDL	Below Detection Limit
BOD	Biochemical Oxygen Demand
CEPI	Comprehensive Environmental Pollution Index
CETP	Common Effluent Treatment Plant
COD	Chemical Oxygen Demand
CPA	Critically Polluted Areas
SPA	Severely Polluted Areas
DO	Dissolved Oxygen
ETP	Effluent Treatment Plant
MIBK	Methyl Isobutyl Ketone
MPCB	Maharashtra Pollution Control Board
NAAQS	National Ambient Air Quality Standards
NO_x	Oxides of Nitrogen
ND	Not Detected
PAH	Poly Aromatic Hydrocarbons
PCB	Poly Chlorinated Biphenyls
PCT	Poly Chlorinated Terphenyls
PM₁₀	Particulate Matter (size less than 10 µm)
PM_{2.5}	Particulate Matter (size less than 2.5 µm)
SO₂	Sulphur Dioxide
STAP	Short Term Action Plan
WHO	World Health Organization

1. Introduction:

Industrial pollution is the contamination of the environment by businesses, particularly plants and factories that dump waste products into the air and water. Industrial waste is one of the largest contributors to the global pollution problem endangering people and the environment. The Central Pollution Control Board (CPCB) has developed a Comprehensive Environmental Pollution Index (CEPI). The main objective of the study is to identify polluted industrial clusters or areas in order to take concerted action and to centrally monitor them at the national level to improve the current status of their environmental components such as air and water quality data, ecological damage, and visual environmental conditions.

The concept of Comprehensive Environmental Pollution Index (CEPI) was evolved by Central Pollution Control Board (CPCB) during 2009-10 as a tool for comprehensive environmental assessment of prominent industrial clusters and formulation of remedial Action Plans for the identified critically polluted areas. Later-on proposals were received from the SPCBs, State Governments, and Industrial Associations and concerned Stakeholders for revisiting the criteria of assessment under CEPI concept. After careful examination and consideration of the suggestions of concerned stake-holders, it was decided to prepare the revised concept of CEPI by eliminating the subjective factors but retaining the factors which can be measured precisely.

The results of the application of the Comprehensive Environmental Pollution Index (CEPI) to selected industrial clusters or areas are presented in this report. The main objective of the study is to identify polluted industrial clusters or areas in order to take concerted action and to centrally monitor them at the national level to improve the current status of their environmental components such as air and water quality data, ecological damage, and visual environmental conditions. A total of 88 industrial areas or clusters have been selected by the Central Pollution Control Board (CPCB) in consultation with the Ministry of Environment & Forests Government of India for the study. The index captures the various dimensions of environment including air, water and land. Comprehensive Environmental Pollution Index (CEPI), which is a rational number to characterize the environmental quality at a given location following the algorithm of source, pathway and receptor have been developed.

Dombivli MIDC is established in 1964 and is sub-divided in two Phases. Phase I is of approximately 148 Ha. & Phase II approximately 97 Ha. Residential Area is developed in between these two phases, having population approx. 2 lakh soles. Both Phases has a mix of industries, mainly Textile, Chemical & Engineering. Except for 10 large & 9 Medium units, most of the chemical manufacturing units are SSI. Textile Industry generates about 80% of the wastewater by volume, though low strength in terms of concentration of pollutants. CETPs are installed & operative in both phases. Phase I (DBESA) - 16 MLD for textile units and Phase II (DCETP) - 1.5 MLD for Chemical & other units.

2. Scope of Work

The Scope of Work consisted of the following:

Monitoring, Sampling, Analysis for Stack, Ambient Air Quality, Surface Water, Waste Water, and Ground Water Quality for identified five Critically Polluted areas (CPAs) in Maharashtra i.e. **Chandrapur, Dombivli, Aurangabad, Navi Mumbai, and Tarapur** and 3 Severely Polluted areas (SPAs) in Maharashtra i.e. **Chembur, Pimpri-Chinchwad and Nashik** as per standard methods.

- At each of the 5 CPAs and 3 SPAs, 24 hourly ambient air quality monitoring to be carried out.

- Representative samples for surface water quality, waste water quality and ground water quality to be collected from prominent surface and ground water bodies located in and around the clusters/areas.
- Submission of complete monitoring, sampling and analysis reports including the summary of the parameters exceeding the prescribed standards/norms for all the 5 CPAs and 3 SPAs.
- Submission of 3 copies of final report with photographs at prominent locations and the CD (soft copy) on completion of the project for every critically polluted and severely polluted area separately.

Monitoring, Sampling, Analysis for Stack, Ambient Air Quality, Surface Water, Waste Water and Ground Water Quality for Dombivli:

- The sampling was carried out in 4 days i.e. on 23rd February to & 26th February 2017 for MIDC Phase-I and Phase II respectively.
- In Dombivli MIDC Phase –I, a total of 6 Stack Monitoring Samples, 6 Ambient Air Quality Monitoring Samples, 6 Waste Water Samples, 3 Ground Water Samples and 3 VOC Samples were collected and analyzed.
- In MIDC Phase –II, a total of 6 Stack Monitoring Samples, 6 Ambient Air Quality Monitoring Samples, 6 Waste Water Samples, 3 Ground Water Samples and 1 VOC Samples was collected and analyzed.

2.1 Stack Emission Parameters

The Stack Emissions were analyzed with the following parameters:

1. Acid Mist
2. Ammonia
3. Carbon Monoxide
4. Chlorine
5. Fluoride(gaseous)
6. Fluoride (particulate)
7. Hydrogen Chloride
8. Hydrogen Sulphide
9. Oxides of Nitrogen
10. Oxygen
11. Polyaromatic Hydrocarbons (Particulate)
12. Suspended Particulate Matter
13. Sulphur Dioxide

14. Benzene
15. Toluene
16. Xylene
17. Volatile Organic Compounds (VOCs)

2.2 Ambient Air Quality Parameters

The Ambient Air Quality was analyzed with the following parameters:

1. Sulphur Dioxide (SO₂)
2. Nitrogen Dioxide (NO₂)
3. Particulate Matter (PM₁₀)
4. Particulate Matter (PM_{2.5})
5. Ozone (O₃)
6. Lead (Pb)
7. Carbon Monoxide (CO)
8. Ammonia (NH₃)
9. Benzene (C₆H₆)
10. Benzo (a) Pyrene (BaP) (Particulate Phase Only)
11. Arsenic (As)
12. Nickel (Ni)

2.3 Water/Waste Water Parameters

The Water/Waste Water was analyzed with the following parameters:

- a. Prominent Surface Water bodies such as outfalls of CETPs, ETPs, treated effluent drainage, river, canal, ponds, lakes and other such water supply resources flowing through the area or flowing adjoining the CPA.
- b. Ground Water Quality data of prominent ground water resources such as observation wells of Central Ground Water Board, drinking water wells, hand pumps, bore wells, hand pumps, bore wells and other such water supply resources located in the industrial cluster/area under consideration or in the peripheral areas.

Basic water quality parameters for surface water and ground water both are as follows:

i. Simple Parameters:

1. Sanitary Survey

2. General Appearance
3. Colour
4. Smell
5. Transparency
6. Ecological(Presence of animals like fish, insects) (Applicable to only surface water)

ii. Regular Monitoring Parameters:

7. pH
8. Oil & Grease
9. Suspended Solids
10. Dissolved Oxygen (% saturation) (Not applicable for ground waters)
11. Chemical Oxygen Demand
12. Biochemical Oxygen Demand
13. Electrical Conductivity
14. Nitrite-Nitrogen
15. Nitrate-Nitrogen
16. (NO₂ + NO₃)-Nitrogen
17. Free Ammonia
18. Total Residual Chlorine
19. Cyanide
20. Fluoride
21. Sulphide
22. Dissolved Phosphate
23. Sodium Absorption Ratio (SAR)

24. Total Coliforms (MPN/100 ml)

25. Faecal Coliforms (MPN/100 ml)

iii. Special Parameters:

26. Total Phosphorous

27. Total Kjeldahl Nitrogen(TKN)

28. Total Ammonia ($\text{NH}_4 + \text{NH}_3$)-Nitrogen

29. Phenols

30. Surface Active Agents

31. Organo Chlorine Pesticides

32. Polynuclear aromatic hydrocarbons (PAH)

33. Polychlorinated Biphenyls (PCB)and Polychlorinated Terphenyls (PCT)

34. Zinc

35. Nickel

36. Copper

37. Hexavalent Chromium

38. Chromium (Total)

39. Arsenic (Total)

40. Lead

41. Cadmium

42. Mercury

43. Manganese

44. Iron

45. Vanadium

46. Selenium

47. Boron

iv. Bioassay (Zebra Fish) Test: For specified samples only.

2.4 Methodology followed in Sampling and Analysis

Industries, places and locations that have been chosen for the sampling are representative of the city/area. Sampling has been done at the potential polluted areas so as to arrive at the CEPI. This will further help the authorities to monitor the areas in order to improve the current status of their environmental components such as air and water quality data, ecological damage and visual environmental conditions. Methodology for sampling, preservation and analysis have been done according to the references incorporated. Methodology of various types of parameters is presented under following annexure:

1. Stack Emission Sampling and Analysis Methodology – **Annexure I**
2. Ambient Air Sampling and Analysis Methodology - **Annexure II**
3. Water/Wastewater Sampling and Analysis Methodology - **Annexure III**

3. Result of Analysis:

Results of Analysis are tabulated below for Stack Emission Monitoring, Ambient Air Quality Monitoring, Waste Water Analysis and Water Analysis. These are followed by their respective graphical representation.

***Kindly note:**

- NA specifies the sample is not analysed for the specific parameter.
- BDL specifies that the result obtained is below deductible limit.

3.1 Stack Emission:

Stack Emission Monitoring Results are compared against The Environment (Protection) Rules, 1986 General Emission Standard - Part D.

Sr.	Name of Industry	Stack Identity	Phase	Table No.
1.	Auchtel Products Ltd.	Boiler	Phase I	I
2.	Krishna Alkali (Bombay) Pvt. Ltd.	Boiler	Phase I	I
3.	Gharda Chemical Ltd.	Process Stack	Phase I	I
4.	Evonik Catalysts India Pvt. Ltd.	Process Stack	Phase I	I
5.	Navrang Dyeing Pvt. Ltd.	Boiler	Phase I	II
6.	Padmavati Synthetics	Boiler	Phase I	II
7.	Metropolitan Eximchem Ltd.	Boiler	Phase II	II
8.	Metropolitan Eximchem Ltd.	Process Stack	Phase II	II
9.	Arch Pharmalabs Ltd.	Process Stack	Phase II	III
10.	Ravi Raj Knit Processing Pvt. Ltd.	Boiler	Phase II	III
11.	Aarti Industries Ltd.	Process Stack	Phase II	III
12.	Pako Hindustan	Boiler	Phase II	III

*** The VOC result of stack emission is provided in Table No. IV**

Table No. I

Name of Industry			Auchtel Products Ltd.	Krishna Alkali (Bombay) Pvt. Ltd.	Gharda Chemical Ltd.	Evonik Catalysts India Pvt. Ltd.
Date of Sampling (XX/02/2017)			23	23	26	25
Sr.	Parameter	Unit	Results			
1.	Particulate Matter (as PM)	mg/Nm ³	13	12	NA	NA
	Std. Limit	mg/Nm³	150	150	NA	NA
2.	Sulphur Dioxide (as SO ₂)	mg/Nm ³	68.9	44.8	NA	NA
		kg/day	12.8	56.1	NA	NA

Name of Industry			Auchtel Products Ltd.	Krishna Alkali (Bombay) Pvt. Ltd.	Gharda Chemical Ltd.	Evonik Catalysts India Pvt. Ltd.
Date of Sampling (XX/02/2017)			23	23	26	25
Sr.	Parameter	Unit	Results			
	Std. Limit	mg/Nm³	100	100	NA	NA
3.	Nitrogen Dioxide (NO ₂)	mg/Nm ³	104	99	NA	NA
	Std. Limit	mg/Nm³	50	50	NA	NA
4.	Hydrogen Chloride (HCL)	mg/Nm ³	NA	NA	19	29.2
	Std. Limit	mg/Nm³	NA	NA	50	50

Table No. II

Name of Industry			Navrang Dyeing Pvt. Ltd.	Padmavati Synthetics	Metropolitan Eximchem Ltd.	Metropolitan Eximchem Ltd.
Date of Sampling (XX/02/2017)			21	21	20	20
Sr.	Parameter	Unit	Results			
1.	Particulate Matter (as PM)	mg/Nm ³	45	59	15	NA
	Std. Limit	mg/Nm³	150	150	150	NA
2.	Sulphur Dioxide (as SO ₂)	mg/Nm ³	55.2	22.1	BDL	BDL
		kg/day	10.6	0.78	BDL	BDL
	Std. Limit	mg/Nm³	100	100	100	100
3.	Nitrogen Dioxide (NO ₂)	mg/Nm ³	126	348	316	NA
	Std. Limit	mg/Nm³	50	50	50	NA
4.	Hydrogen Chloride (HCL)	mg/Nm ³	NA	NA	NA	NA

Table No. III


Name of Industry			Arch Pharmalabs Ltd.	Ravi Raj Knit Processing Pvt. Ltd.	Aarti Industries Ltd.	Pako Hindustan
Date of Sampling (XX/02/2017)			20	21	22	22
Sr.	Parameter	Unit	Results			
1.	Particulate Matter (as PM)	mg/Nm ³	NA	15	NA	12
	Std. Limit	mg/Nm³	NA	150	NA	150
2.	Sulphur Dioxide (as SO ₂)	mg/Nm ³	NA	38.6	NA	28
		kg/day	NA	1.91	NA	5.59
	Std. Limit	mg/Nm³	NA	100	NA	100
3.	Nitrogen Dioxide (NO ₂)	mg/Nm ³	NA	124	NA	50.1
	Std. Limit	mg/Nm³	NA	50	NA	50
4.	Hydrogen Chloride (HCL)	mg/Nm ³	59	NA	22	NA
	Std. Limit	mg/Nm³	50	NA	50	NA


Table No. IV

Name of Industry			Auchtel Products Ltd.	Gharda Chemical Ltd.	Evonik Catalysts India Pvt. Ltd.
Date of Sampling (XX/02/2017)			23	23	25
Sr.	Parameter	Unit	Results		
1.	VOC				
I.	Methyl Isobutyl Ketone	mg/Nm ³	ND	ND	ND
II.	Benzene	mg/Nm ³	2.45	2.15	2.34
III.	Toulene	mg/Nm ³	12.5	8.52	8.76

Name of Industry			Auchtel Products Ltd.	Gharda Chemical Ltd.	Evonik Catalysts India Pvt. Ltd.
Date of Sampling (XX/02/2017)			23	23	25
Sr.	Parameter	Unit	Results		
IV.	Xylene	mg/Nm ³	ND	ND	ND
V.	Ethyl Benzene	mg/Nm ³	ND	ND	ND
VI.	Ethyl Acetate	mg/Nm ³	ND	ND	ND

Graphs: Stack Monitoring for Dombivli MIDC:

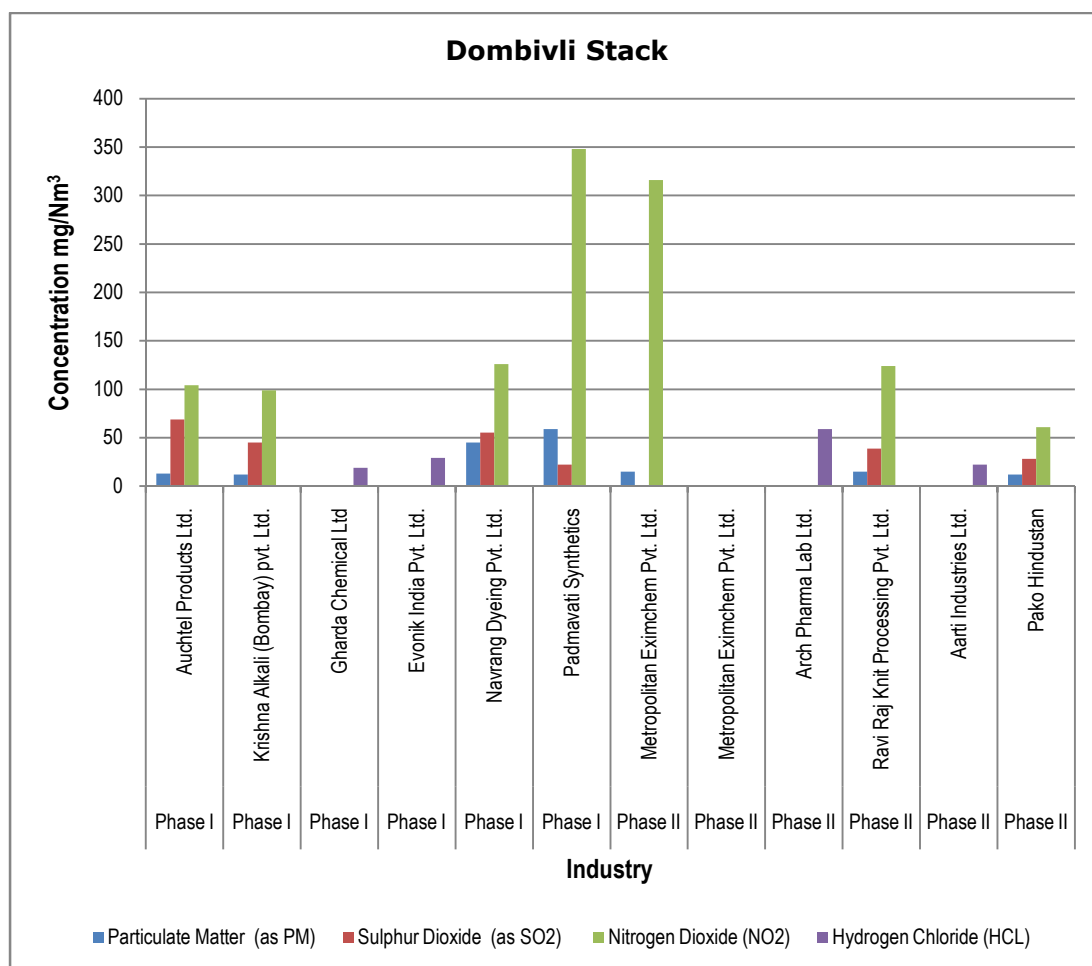

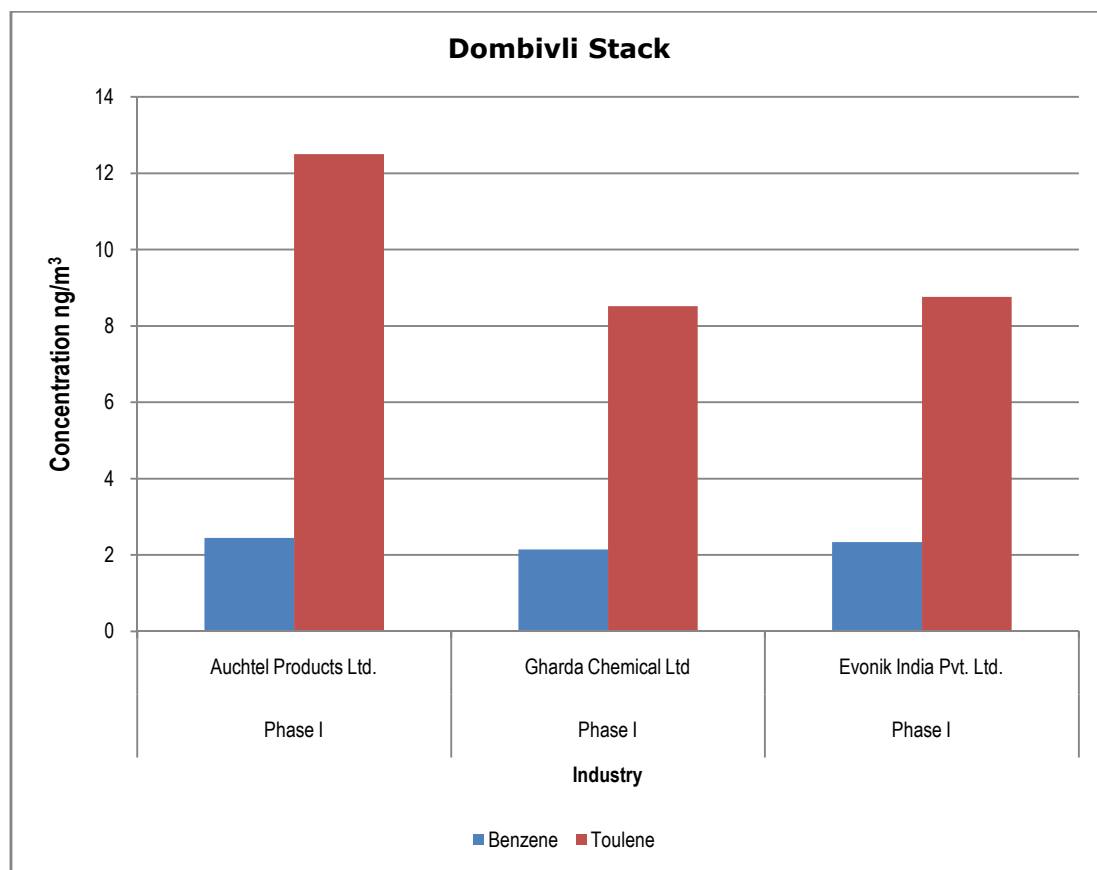

3.2 Ambient Air Quality:

In order to arrive at conclusions, the Ambient Air Quality Monitoring Results are compared against National Ambient Air Quality Standards, 2009 (**Annexure IV**).

Sr.	Location	Location detail	Phase	Table No.
1.	Dombivli Better Environment System Association CETP	Near Main Gate no. 2	Phase I	I
2.	Auctel Products Ltd.	Near Main Gate	Phase I	I
3.	Kalyan Ambernath Manufacture Association (KAMA Office)	Near Main Gate	Phase I	I
4.	Innovative Organochem Pvt. Ltd.	Near Office	Phase I	I
5.	Gopal Print Processors Pvt. Ltd.	Near Main Gate	Phase I	II
6.	Zenith industrial Rubber Product Pvt. Ltd.	Near Main Gate	Phase I	II
7.	CETP MIDC Phase II	Near Office	Phase II	II
8.	Arch Pharma Lab Ltd.	Near ETP	Phase II	II
9.	Aarti Industries Ltd.	Near Main Gate	Phase II	III

Sr.	Location	Location detail	Phase	Table No.
10.	Suvishrhu Speciality Chemicals Pvt. Ltd.	Near Main Gate	Phase II	III
11.	Dhanlaxmi Fabrics Ltd.	Near Main Gate	Phase II	III
12.	VNS Industries Pvt. Ltd.	Near Main Gate	Phase II	III

*** The VOC result of Ambient Air emission is provided in Table No. IV**

Table No. I

Location				Dombivli Better Environment System Association CETP	Auchtel Products Ltd.	Kalyan Ambarnath Manufacture Association (KAMA Office)	Innovative Organochem Pvt. Ltd.
Date of Sampling (XX/02/2017)				24	24	26	26
Sr.	Parameters	Unit	Std. Limit (NAAQS 2009)	Results			
1.	Sulphur Dioxide (SO ₂)	µg/m ³	80	BDL	BDL	BDL	4.12
2.	Nitrogen Dioxide (NO ₂)	µg/m ³	80	32.4	6.64	24.6	4.43
3.	Particulate Matter (size less than 10 µm) or PM ₁₀	µg/m ³	100	118	105	128	196
4.	Particulate Matter (size less than 2.5 µm) or PM _{2.5}	µg/m ³	60	98	84	115	72
5.	Ozone (O ₃)	µg/m ³	180	BDL	BDL	BDL	BDL
6.	Lead (Pb)	µg/m ³	1	BDL	BDL	0.04	0.18
7.	Carbon Monoxide (CO)	mg/m ³	4	3.1	2	1.65	1.89
8.	Ammonia (NH ₃)	µg/m ³	400	225	132	BDL	BDL

Location				Dombivli Better Environment System Association CETP	Auchtel Products Ltd.	Kalyan Ambernath Manufacture Association (KAMA Office)	Innovative Organochem Pvt. Ltd.
Date of Sampling (XX/02/2017)				24	24	26	26
Sr.	Parameters	Unit	Std. Limit (NAAQS 2009)	Results			
9.	Benzene (C ₆ H ₆)	µg/m ³	5	13.5	5.9	1.29	BDL
10.	Benzo (a) Pyrene (BaP) – particulate phase only	ng/m ³	1	BDL	BDL	BDL	BDL
11.	Arsenic (As)	ng/m ³	6	BDL	BDL	BDL	BDL
12.	Nickel (Ni)	ng/m ³	20	17.1	6.14	7.35	5.28

Table No. II

Location				Gopal Print Processors Pvt. Ltd.	Zenith industrial Rubber Product Pvt. Ltd.	CETP MIDC Phase II	Arch Pharma Lab Ltd.
Date of Sampling (XX/02/2017)				25	25	20	20
Sr.	Parameters	Unit	Std. Limit (NAAQS 2009)	Results			
1.	Sulphur Dioxide (SO ₂)	µg/m ³	80	4.31	BDL	8.38	3.83
2.	Nitrogen Dioxide (NO ₂)	µg/m ³	80	3.93	20.1	7.03	19.1
3.	Particulate Matter (size less than 10 µm) or PM ₁₀	µg/m ³	100	236	247	209	212

Location				Gopal Print Processors Pvt. Ltd.	Zenith industrial Rubber Product Pvt. Ltd.	CETP MIDC Phase II	Arch Pharma Lab Ltd.
Date of Sampling (XX/02/2017)				25	25	20	20
Sr.	Parameters	Unit	Std. Limit (NAAQS 2009)	Results			
4.	Particulate Matter (size less than 2.5 µm) or PM _{2.5}	µg/m ³	60	87	83	62	59
5.	Ozone (O ₃)	µg/m ³	180	BDL	BDL	BDL	BDL
6.	Lead (Pb)	µg/m ³	1	0.69	0.024	0.1	0.027
7.	Carbon Monoxide (CO)	mg/m ³	4	2.25	2.78	1.78	1.56
8.	Ammonia (NH ₃)	µg/m ³	400	BDL	64	BDL	BDL
9.	Benzene (C ₆ H ₆)	µg/m ³	5	1.06	18.2	BDL	3.18
10.	Benzo (a) Pyrene (BaP) – particulate phase only	ng/m ³	1	BDL	BDL	BDL	BDL
11.	Arsenic (As)	ng/m ³	6	BDL	BDL	BDL	BDL
12.	Nickel (Ni)	ng/m ³	20	5.89	5.02	30.3	28


Table No. III



Location				Aarti Industries Ltd.	Suvishrhu Speciality Chemicals Pvt. Ltd.	Dhanlaxmi Fabrics Ltd.	VNS Industries Pvt. Ltd.
Date of Sampling (XX/02/2017)				21	21	23	23
Sr.	Parameters	Unit	Std. Limit (NAAQS 2009)	Results			
1.	Sulphur Dioxide (SO ₂)	µg/m ³	80	4.03	8.92	BDL	5.28
2.	Nitrogen Dioxide (NO ₂)	µg/m ³	80	16.37	19.1	12.3	14.8
3.	Particulate Matter (size less than 10 µm) or PM ₁₀	µg/m ³	100	293	273	259	266
4.	Particulate Matter (size less than 2.5 µm) or PM _{2.5}	µg/m ³	60	73	67	59	54
5.	Ozone (O ₃)	µg/m ³	180	30.5	BDL	BDL	BDL
6.	Lead (Pb)	µg/m ³	1	1.44	1.54	0.27	BDL
7.	Carbon Monoxide (CO)	mg/m ³	4	1.86	1.79	1.95	1.35
8.	Ammonia (NH ₃)	µg/m ³	400	60.5	BDL	79.9	BDL
9.	Benzene (C ₆ H ₆)	µg/m ³	5	BDL	BDL	25.7	BDL
10.	Benzo (a) Pyrene (BaP) – particulate phase only	ng/m ³	1	BDL	BDL	BDL	BDL
11.	Arsenic (As)	ng/m ³	6	BDL	BDL	BDL	BDL
12.	Nickel (Ni)	ng/m ³	20	27.7	29.3	5.4	8.84


Table No. IV

Location			Dhanlaxmi Fabrics Ltd.
Date of Sampling (XX/02/2017)			23
Sr.	Parameters	Unit	Results
1.	VOC		
I.	Methyl Isobutyl Ketone	mg/Nm ³	ND
II.	Benzene	mg/Nm ³	2.19
III.	Toulene	mg/Nm ³	8.1
IV.	Xylene	mg/Nm ³	ND
V.	Ethyl Benzene	mg/Nm ³	ND
VI.	Ethyl Acetate	mg/Nm ³	ND

Graphs: Ambient Air Quality Monitoring for Dombivli MIDC:

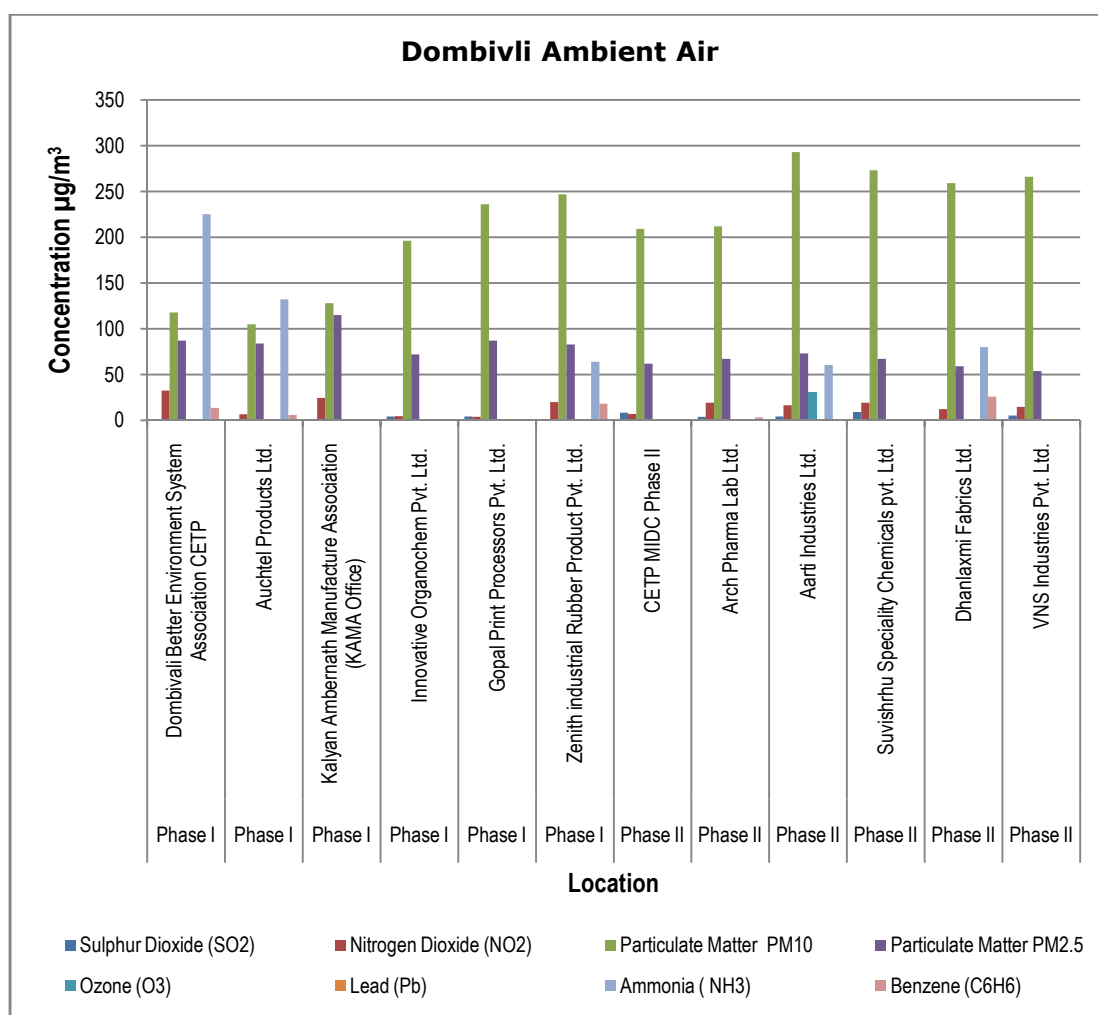

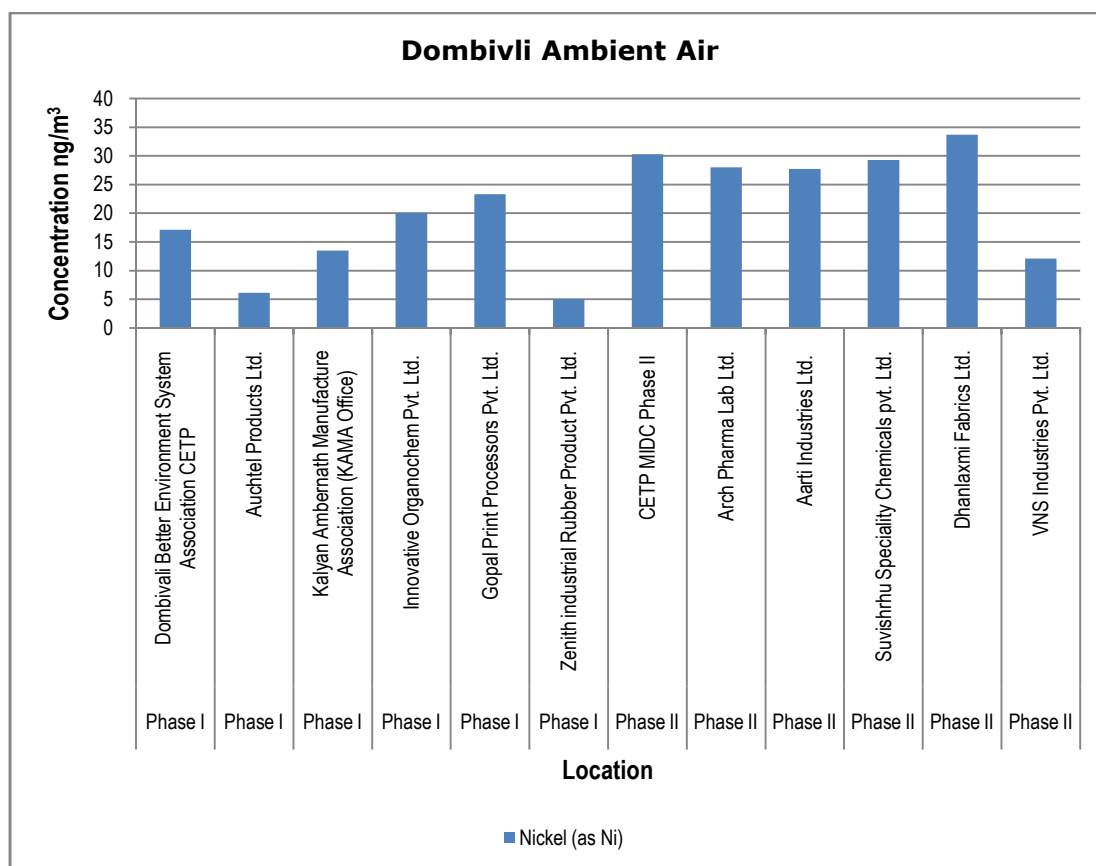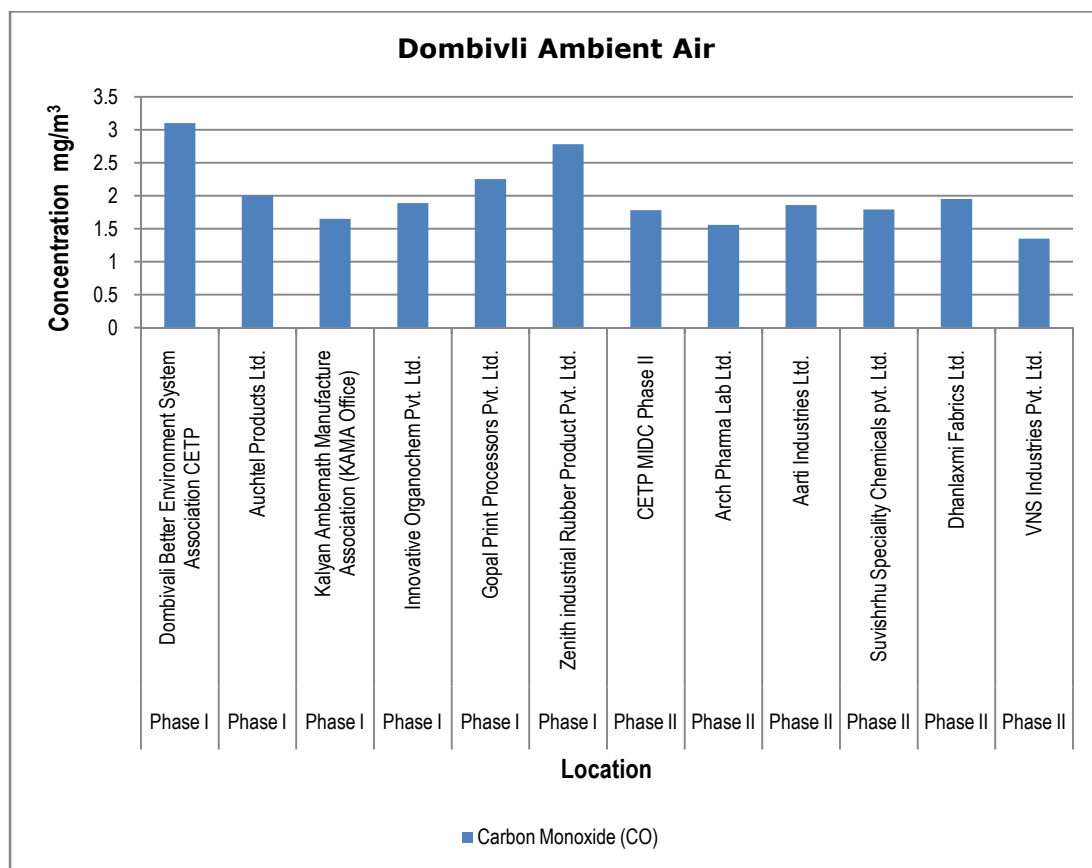

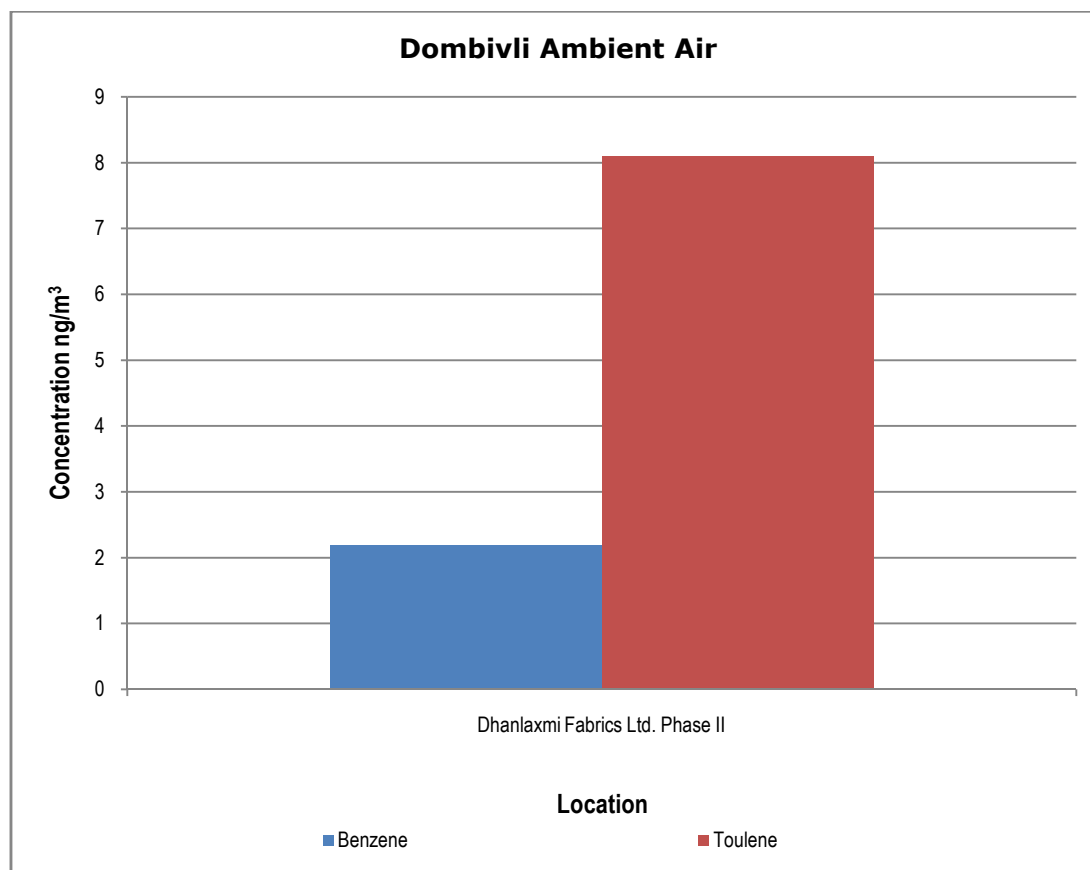

3.3 Water/ Waste Water Quality:

Water Analysis Results are compared against CPCB document on criteria for Comprehensive Environmental Assessment of Industrial Clusters-Water Quality Parameters Requirement and Classification (Annexure VI), CPCB Water Quality Criteria (Annexure V) and Drinking Water Specification, IS 10500:2012 (Annexure IV), Wastewater Analysis Results are compared with General Standards for Discharge of Environmental Pollutants Part A: Effluents, The Environment (Protection) Rules, 1986, Schedule VI.

Sr.	Location	Source	Phase	Table No.
1.	CETP	CETP Inlet	Phase I	I
2.	CETP	CETP Outlet	Phase I	I
3.	Gharda Chemical Ltd.	ETP Outlet	Phase I	I
4.	Krishna Alkali Pvt. Ltd.	ETP Outlet	Phase I	I
5.	Evonik Catalysts India Pvt. Ltd.	ETP Outlet	Phase I	II
6.	Tirupati Textile Mills	ETP Outlet	Phase I	II
7.	Nagrik Textiles Pvt. Ltd.	ETP Outlet	Phase I	II

Sr.	Location	Source	Phase	Table No.
8.	Dombivli common	CETP Inlet	Phase II	II
9.	Dombivli common	CETP Outlet	Phase II	III
10.	Mahabir Dyeing and Printing Mills Pvt. Ltd.	ETP Outlet	Phase II	III
11.	Metropolitan Eximchem Pvt. Ltd.	ETP Outlet	Phase II	III
12.	Ridham Synthetic Pvt. Ltd.	ETP Outlet	Phase II	IV
13.	Safe A & T Technology Pvt. Ltd.	ETP Outlet	Phase II	IV

Table No. I

Location				CETP Inlet	CETP Outlet	Gharda Chemical Ltd.	Krishna Alkali Pvt. Ltd.
Date of Sampling (XX/02/2017)				23	23	26	26
Sr.	Parameters	Unit	Std. Limit	Results			
1.	Colour	Hazen		200	200	1	200
2.	Smell	-		Agreeable	Agreeable	Agreeable	Agreeable
3.	pH	-	5.5 - 9.0	7.31	7.4	6.93	7.31
4.	Oil & Grease	mg/L	10.0	12	3	1	12
5.	Suspended Solids	mg/L	100.0	64	22	9	64
6.	Dissolved Oxygen (% Saturation)	%		8	0	75	8
7.	Chemical Oxygen Demand	mg/L	250.0	5600	1600	149	5600
8.	Biochemical Oxygen Demand (3 days, 27° C)	mg/L	30.0	1765	488	45	1765

Location				CETP Inlet	CETP Outlet	Gharda Chemical Ltd.	Krishna Alkali Pvt. Ltd.
Date of Sampling (XX/02/2017)				23	23	26	26
Sr.	Parameters	Unit	Std. Limit	Results			
9.	Electrical Conductivity (at 25° C)	µmho/cm		10820	4650	6390	10820
10.	Nitrite Nitrogen (as NO ₂)	mg/L		0.45	0.25	0.57	0.45
11.	Nitrate Nitrogen (as NO ₃)	mg/L	10.0	BDL	0.1	33.6	BDL
12.	(NO ₂ + NO ₃)-Nitrogen	mg/L	5.0	0.45	0.35	34.2	0.45
13.	Free Ammonia (as NH ₃ -N)	mg/L	5.0	0.18	0.16	BDL	0.18
14.	Total Residual Chlorine	mg/L	1.0	BDL	BDL	BDL	BDL
15.	Cyanide (as CN)	mg/L	0.2	BDL	BDL	BDL	BDL
16.	Fluoride (as F)	mg/L	2.0	BDL	0.94	BDL	BDL
17.	Sulphide (as S ²⁻)	mg/L	2.0	55.2	77.6	BDL	55.2
18.	Dissolved Phosphate (as P)	mg/L	5.0	0.16	BDL	BDL	0.16
19.	Sodium Absorption Ratio	mg/L		4.54	23.1	23	4.54
20.	Total Coliforms	MPN index/ 100 ml	100.0	1.3 x 10 ⁷	240	7.8	1.3 x 10 ⁷

Location				CETP Inlet	CETP Outlet	Gharda Chemical Ltd.	Krishna Alkali Pvt. Ltd.
Date of Sampling (XX/02/2017)				23	23	26	26
Sr.	Parameters	Unit	Std. Limit	Results			
21.	Faecal Coliforms	MPN index/ 100 ml	1000.0	2.4×10^2	79	BDL	2.4×10^2
22.	Total Phosphorous (as P)	mg/L	1.0	0.32	BDL	BDL	0.32
23.	Total Kjeldahl Nitrogen (as TKN)	mg/L	100.0	260	127	BDL	260
24.	Total Ammonia (NH ₄ +NH ₃)-Nitrogen	mg/L	5.0	108	77.3	BDL	108
25.	Phenols (as C ₆ H ₅ OH)	mg/L	3.0	BDL	BDL	BDL	BDL
26.	Surface Active Agents (as MBAS)	mg/L	3.0	0.14	0.13	BDL	0.14
27.	Organo Chlorine Pesticides						
I.	Alachlor	µg/L	2.0	BDL	BDL	BDL	BDL
II.	Atrazine	µg/L	0.2	BDL	BDL	BDL	BDL
III.	Aldrin	µg/L	0.1	BDL	BDL	BDL	BDL
IV.	Dieldrin	µg/L	2.0	BDL	BDL	BDL	BDL
V.	Alpha HCH	µg/L	0.01	0.034	BDL	BDL	0.034
VI.	Beta HCH	µg/L	2.0	BDL	BDL	BDL	BDL
VII.	Delta HCH	µg/L	3.0	BDL	BDL	BDL	BDL
VIII.	Butachlor	µg/L	0.2	BDL	BDL	BDL	BDL
IX.	p,p DDT	µg/L	0.05	BDL	BDL	BDL	BDL

Location				CETP Inlet	CETP Outlet	Gharda Chemical Ltd.	Krishna Alkali Pvt. Ltd.
Date of Sampling (XX/02/2017)				23	23	26	26
Sr.	Parameters	Unit	Std. Limit	Results			
X.	o,p DDT	µg/L	100.0	BDL	BDL	BDL	BDL
XI.	p,p DDE	µg/L	250.0	BDL	BDL	BDL	BDL
XII.	o,p DDE	µg/L	30.0	BDL	BDL	BDL	BDL
XIII.	p,p DDD	µg/L		BDL	BDL	BDL	BDL
XIV.	o,p DDD	µg/L		BDL	BDL	BDL	BDL
XV.	Alpha Endosulfan	µg/L	10.0	BDL	BDL	BDL	BDL
XVI.	Beta Endosulfan	µg/L		BDL	BDL	BDL	BDL
XVII.	Endosulfan Sulphate	µg/L	5.0	BDL	BDL	BDL	BDL
XVIII.	Y HCH (Lindane)	µg/L	1.0	BDL	BDL	BDL	BDL
28.	Polynuclear aromatic hydrocarbons (as PAH)	mg/L	0.2	0.22	0.59	0.0001	BDL
29.	Polychlorinated Biphenyls (PCB)	mg/L	2.0	BDL	BDL	BDL	BDL
30.	Zinc (as Zn)	mg/L	5.0	0.72	0.16	BDL	0.72
31.	Nickel (as Ni)	mg/L	3.0	0.04	BDL	BDL	0.04
32.	Copper (as Cu)	mg/L		0.27	0.06	BDL	0.27
33.	Hexavalent Chromium (as Cr ⁶⁺)	mg/L	0.1	BDL	BDL	BDL	BDL
34.	Total Chromium (as Cr)	mg/L	2.0	0.17	0.03	BDL	0.17

Location				CETP Inlet	CETP Outlet	Gharda Chemical Ltd.	Krishna Alkali Pvt. Ltd.
Date of Sampling (XX/02/2017)				23	23	26	26
Sr.	Parameters	Unit	Std. Limit	Results			
35.	Total Arsenic (as As)	mg/L	0.2	BDL	BDL	BDL	BDL
36.	Lead (as Pb)	mg/L	0.1	BDL	BDL	BDL	BDL
37.	Cadmium (as Cd)	mg/L	2.0	BDL	BDL	BDL	BDL
38.	Mercury (as Hg)	mg/L	0.01	0.003	0.03	0.002	0.003
39.	Manganese (as Mn)	mg/L	2.0	0.25	0.08	0.05	0.25
40.	Iron (as Fe)	mg/L	3.0	1.77	0.6	0.17	1.77
41.	Vanadium (as V)	mg/L	0.2	BDL	BDL	BDL	BDL
42.	Selenium (as Se)	mg/L	0.05	0.008	BDL	BDL	0.008
43.	Boron (as B)	mg/L		0.2	BDL	0.39	0.2
44.	Bioassay Test on fish	% survival	90% survi val after 96h in 100% efflue nt	0	100	100	0

Table No. II

Location				Evonik Catalysts India Pvt. Ltd.	Tirupati Textile Mills	Nagrik Textiles Pvt. Ltd.	Dombivli common
Date of Sampling (XX/02/2017)				26	26	26	21
Sr.	Parameters	Unit	Std. Limit	Results			
1.	Colour	Hazen		1	100	200	200
2.	Smell	-		Agreeable	Disagreeable	Disagreeable	Disagreeable
3.	pH	-	5.5 - 9.0	7.88	5.76	5.75	7.23
4.	Oil & Grease	mg/L	10.0	BDL	1.6	1.2	13
5.	Suspended Solids	mg/L	100.0	40	41	42	35
6.	Dissolved Oxygen (% Saturation)	%		80	40	35	25
7.	Chemical Oxygen Demand	mg/L	250.0	90	458	199	6000
8.	Biochemical Oxygen Demand (3 days, 27° C)	mg/L	30.0	28	145	61	1886
9.	Electrical Conductivity (at 25° C)	µmho/cm		32300	1521	850	2900
10.	Nitrite Nitrogen (as NO ₂)	mg/L		0.25	0.08	0.07	0.13
11.	Nitrate Nitrogen (as NO ₃)	mg/L	10.0	41.3	1.86	10.2	0.27
12.	(NO ₂ + NO ₃)-Nitrogen	mg/L	5.0	41.6	1.94	10.3	0.4

Location				Evonik Catalysts India Pvt. Ltd.	Tirupati Textile Mills	Nagrik Textiles Pvt. Ltd.	Dombivli common
Date of Sampling (XX/02/2017)				26	26	26	21
Sr.	Parameters	Unit	Std. Limit	Results			
13.	Free Ammonia (as NH ₃ -N)	mg/L	5.0	BDL	BDL	BDL	BDL
14.	Total Residual Chlorine	mg/L	1.0	BDL	BDL	BDL	BDL
15.	Cyanide (as CN)	mg/L	0.2	BDL	BDL	BDL	BDL
16.	Fluoride (as F)	mg/L	2.0	0.7	BDL	BDL	0.7
17.	Sulphide (as S ²⁻)	mg/L	2.0	BDL	19.2	19.4	BDL
18.	Dissolved Phosphate (as P)	mg/L	5.0	BDL	BDL	0.07	1.12
19.	Sodium Absorption Ratio	mg/L		23.9	11.8	3.62	14.9
20.	Total Coliforms	MPN index/ 100 ml	100.0	BDL	5.4 x 10 ⁶	1.4 x 10 ⁷	1.7 x 10 ⁷
21.	Faecal Coliforms	MPN index/ 100 ml	1000.0	BDL	BDL	BDL	1.7 x 10 ⁷
22.	Total Phosphorous (as P)	mg/L	1.0	0.1	BDL	0.24	1.36
23.	Total Kjeldahl Nitrogen (as TKN)	mg/L	100.0	33.3	1.27	2.65	162
24.	Total Ammonia (NH ₄ +NH ₃)-Nitrogen	mg/L	5.0	4.25	0.46	0.23	30

Location				Evonik Catalysts India Pvt. Ltd.	Tirupati Textile Mills	Nagrik Textiles Pvt. Ltd.	Dombivli common
Date of Sampling (XX/02/2017)				26	26	26	21
Sr.	Parameters	Unit	Std. Limit	Results			
25.	Phenols (as C ₆ H ₅ OH)	mg/L	3.0	BDL	BDL	BDL	BDL
26.	Surface Active Agents (as MBAS)	mg/L	3.0	BDL	0.11	0.1	BDL
27.	Organo Chlorine Pesticides						
I.	Alachlor	µg/L	2.0	BDL	BDL	BDL	BDL
II.	Atrazine	µg/L	0.2	BDL	BDL	BDL	BDL
III.	Aldrin	µg/L	0.1	BDL	BDL	BDL	BDL
IV.	Dieldrin	µg/L	2.0	BDL	BDL	BDL	BDL
V.	Alpha HCH	µg/L	0.01	BDL	BDL	BDL	BDL
VI.	Beta HCH	µg/L	2.0	BDL	BDL	BDL	BDL
VII.	Delta HCH	µg/L	3.0	BDL	BDL	BDL	BDL
VIII.	Butachlor	µg/L	0.2	BDL	BDL	BDL	BDL
IX.	p,p DDT	µg/L	0.05	BDL	BDL	BDL	BDL
X.	o,p DDT	µg/L	100.0	BDL	BDL	BDL	BDL
XI.	p,p DDE	µg/L	250.0	BDL	BDL	BDL	BDL
XII.	o,p DDE	µg/L	30.0	BDL	BDL	BDL	BDL
XIII.	p,p DDD	µg/L		BDL	BDL	BDL	BDL
XIV.	o,p DDD	µg/L		BDL	BDL	BDL	BDL
XV.	Alpha Endosulfan	µg/L	10.0	BDL	BDL	BDL	BDL
XVI.	Beta Endosulfan	µg/L		BDL	BDL	BDL	BDL

Location				Evonik Catalysts India Pvt. Ltd.	Tirupati Textile Mills	Nagrik Textiles Pvt. Ltd.	Dombivli common
Date of Sampling (XX/02/2017)				26	26	26	21
Sr.	Parameters	Unit	Std. Limit	Results			
XVII.	Endosulfan Sulphate	µg/L	5.0	BDL	BDL	BDL	BDL
XVIII.	Y HCH (Lindane)	µg/L	1.0	BDL	BDL	BDL	BDL
28.	Polynuclear aromatic hydrocarbons (as PAH)	mg/L	0.2	0.0001	0.0002	0.0001 6	0.04
29.	Polychlorinated Biphenyls (PCB)	mg/L	2.0	BDL	BDL	BDL	BDL
30.	Zinc (as Zn)	mg/L	5.0	BDL	BDL	BDL	0.12
31.	Nickel (as Ni)	mg/L	3.0	0.28	BDL	BDL	0.02
32.	Copper (as Cu)	mg/L		BDL	0.024	0.06	0.17
33.	Hexavalent Chromium (as Cr ⁶⁺)	mg/L	0.1	BDL	BDL	BDL	BDL
34.	Total Chromium (as Cr)	mg/L	2.0	0.58	BDL	BDL	BDL
35.	Total Arsenic (as As)	mg/L	0.2	BDL	BDL	BDL	BDL
36.	Lead (as Pb)	mg/L	0.1	BDL	0.02	BDL	0.02
37.	Cadmium (as Cd)	mg/L	2.0	BDL	BDL	BDL	BDL
38.	Mercury (as Hg)	mg/L	0.01	0.0008	0.0022	0.013	0.005
39.	Manganese (as Mn)	mg/L	2.0	0.03	0.03	0.05	0.23

Location				Evonik Catalysts India Pvt. Ltd.	Tirupati Textile Mills	Nagrik Textiles Pvt. Ltd.	Dombivli common
Date of Sampling (XX/02/2017)				26	26	26	21
Sr.	Parameters	Unit	Std. Limit	Results			
40.	Iron (as Fe)	mg/L	3.0	BDL	BDL	0.24	1.93
41.	Vanadium (as V)	mg/L	0.2	BDL	BDL	BDL	0.02
42.	Selenium (as Se)	mg/L	0.05	BDL	BDL	BDL	BDL
43.	Boron (as B)	mg/L		BDL	BDL	BDL	0.12
44.	Bioassay Test on fish	% survival	90% survival after 96h in 100% effluent	0	0	100	100

Table No. III

Location				Dombivli common	Mahabir Dyeing and Printing Mills Pvt. Ltd.	Metropolitan Eximchem Pvt. Ltd.
Date of Sampling (XX/02/2017)				21	21	21
Sr.	Parameters	Unit	Std. Limit	Results		
1.	Colour	Hazen		200	1	200
2.	Smell	-		Disagreeable	Agreeable	Disagreeable
3.	pH	-	5.5 -9.0	7.52	6.07	6.94
4.	Oil & Grease	mg/L	10.0	5	1.6	6
5.	Suspended Solids	mg/L	100.0	27	36	18

Location				Dombivli common	Mahabir Dyeing and Printing Mills Pvt. Ltd.	Metropolitan Eximchem Pvt. Ltd.
Date of Sampling (XX/02/2017)				21	21	21
Sr.	Parameters	Unit	Std. Limit	Results		
6.	Dissolved Oxygen (% Saturation)	%		82	60	5
7.	Chemical Oxygen Demand	mg/L	250.0	1600	400	1400
8.	Biochemical Oxygen Demand (3 days, 27° C)	mg/L	30.0	488	122	1221
9.	Electrical Conductivity (at 25° C)	µmho/cm		2580	2600	2690
10.	Nitrite Nitrogen (as NO ₂)	mg/L		0.68	0.02	0.18
11.	Nitrate Nitrogen (as NO ₃)	mg/L	10.0	8.61	7.3	BDL
12.	(NO ₂ + NO ₃)-Nitrogen	mg/L	5.0	9.29	7.32	0.18
13.	Free Ammonia (as NH ₃ -N)	mg/L	5.0	BDL	BDL	BDL
14.	Total Residual Chlorine	mg/L	1.0	BDL	BDL	BDL
15.	Cyanide (as CN)	mg/L	0.2	BDL	BDL	BDL
16.	Fluoride (as F)	mg/L	2.0	0.56	BDL	BDL
17.	Sulphide (as S ²⁻)	mg/L	2.0	17.6	11.2	BDL

Location				Dombivli common	Mahabir Dyeing and Printing Mills Pvt. Ltd.	Metropolitan Eximchem Pvt. Ltd.
Date of Sampling (XX/02/2017)				21	21	21
Sr.	Parameters	Unit	Std. Limit	Results		
18.	Dissolved Phosphate (as P)	mg/L	5.0	0.64	0.11	BDL
19.	Sodium Absorption Ratio	mg/L		18.9	19.6	8.81
20.	Total Coliforms	MPN index/ 100 ml	100.0	240	1.4×10^6	9.2×10^3
21.	Faecal Coliforms	MPN index/ 100 ml	1000.0	7.8	7.8	540
22.	Total Phosphorous (as P)	mg/L	1.0	0.68	0.13	0.12
23.	Total Kjeldahl Nitrogen (as TKN)	mg/L	100.0	77.9	1.73	209
24.	Total Ammonia (NH ₄ +NH ₃)-Nitrogen	mg/L	5.0	0.68	0.46	115
25.	Phenols (as C ₆ H ₅ OH)	mg/L	3.0	BDL	BDL	BDL
26.	Surface Active Agents (as MBAS)	mg/L	3.0	BDL	0.25	BDL
27.	Organo Chlorine Pesticides					
I.	Alachlor	µg/L	2.0	BDL	BDL	BDL
II.	Atrazine	µg/L	0.2	BDL	BDL	BDL

Location				Dombivli common	Mahabir Dyeing and Printing Mills Pvt. Ltd.	Metropolitan Eximchem Pvt. Ltd.
Date of Sampling (XX/02/2017)				21	21	21
Sr.	Parameters	Unit	Std. Limit	Results		
III.	Aldrin	µg/L	0.1	BDL	BDL	BDL
IV.	Dieldrin	µg/L	2.0	BDL	BDL	BDL
V.	Alpha HCH	µg/L	0.01	BDL	BDL	BDL
VI.	Beta HCH	µg/L	2.0	BDL	BDL	BDL
VII.	Delta HCH	µg/L	3.0	BDL	BDL	BDL
VIII.	Butachlor	µg/L	0.2	BDL	BDL	BDL
IX.	p,p DDT	µg/L	0.05	BDL	BDL	BDL
X.	o,p DDT	µg/L	100.0	BDL	BDL	BDL
XI.	p,p DDE	µg/L	250.0	BDL	BDL	BDL
XII.	o,p DDE	µg/L	30.0	BDL	BDL	BDL
XIII.	p,p DDD	µg/L		BDL	BDL	BDL
XIV.	o,p DDD	µg/L		BDL	BDL	BDL
XV.	Alpha Endosulfan	µg/L	10.0	BDL	BDL	BDL
XVI.	Beta Endosulfan	µg/L		BDL	BDL	BDL
XVII.	Endosulfan Sulphate	µg/L	5.0	BDL	BDL	BDL
XVIII.	Y HCH (Lindane)	µg/L	1.0	BDL	BDL	BDL
28.	Polynuclear aromatic hydrocarbons (as PAH)	mg/L	0.2	0.18	0.11	0.21
29.	Polychlorinated Biphenyls (PCB)	mg/L	2.0	BDL	BDL	BDL

Location				Dombivli common	Mahabir Dyeing and Printing Mills Pvt. Ltd.	Metropolitan Eximchem Pvt. Ltd.
Date of Sampling (XX/02/2017)				21	21	21
Sr.	Parameters	Unit	Std. Limit	Results		
30.	Zinc (as Zn)	mg/L	5.0	0.11	0.06	BDL
31.	Nickel (as Ni)	mg/L	3.0	0.03	0.02	0.02
32.	Copper (as Cu)	mg/L		0.13	0.07	BDL
33.	Hexavalent Chromium (as Cr ⁶⁺)	mg/L	0.1	BDL	BDL	BDL
34.	Total Chromium (as Cr)	mg/L	2.0	BDL	BDL	BDL
35.	Total Arsenic (as As)	mg/L	0.2	BDL	BDL	BDL
36.	Lead (as Pb)	mg/L	0.1	0.02	0.02	BDL
37.	Cadmium (as Cd)	mg/L	2.0	BDL	BDL	BDL
38.	Mercury (as Hg)	mg/L	0.01	0.003	0.004	0.003
39.	Manganese (as Mn)	mg/L	2.0	BDL	0.04	0.03
40.	Iron (as Fe)	mg/L	3.0	0.82	0.31	0.69
41.	Vanadium (as V)	mg/L	0.2	0.02	BDL	BDL
42.	Selenium (as Se)	mg/L	0.05	BDL	BDL	BDL
43.	Boron (as B)	mg/L		0.13	BDL	BDL

Location				Dombivli common	Mahabir Dyeing and Printing Mills Pvt. Ltd.	Metropolitan Eximchem Pvt. Ltd.
Date of Sampling (XX/02/2017)				21	21	21
Sr.	Parameters	Unit	Std. Limit	Results		
44.	Bioassay Test on fish	% survival	90% survival after 96h in 100%effluent	100	80	0

Table No. IV

Location				Ridham Synthetic Pvt. Ltd.	Safe A & T Technology Pvt. Ltd.
Date of Sampling (XX/02/2017)				21	21
Sr.	Parameters	Unit	Std. Limit	Results	
1.	Colour	Hazen		1	1
2.	Smell	-		Agreeable	Agreeable
3.	pH	-	5.5 -9.0	6.54	6.77
4.	Oil & Grease	mg/L	10.0	BDL	BDL
5.	Suspended Solids	mg/L	100.0	12	15
6.	Dissolved Oxygen (% Saturation)	%		120	85
7.	Chemical Oxygen Demand	mg/L	250.0	90	10
8.	Biochemical Oxygen Demand (3 days,27° C)	mg/L	30.0	28	3.04
9.	Electrical Conductivity (at 25° C)	µmho/cm		140.3	1761


Location				Ridham Synthetic Pvt. Ltd.	Safe A & T Technology Pvt. Ltd.
Date of Sampling (XX/02/2017)				21	21
Sr.	Parameters	Unit	Std. Limit	Results	
10.	Nitrite Nitrogen (as NO ₂)	mg/L		BDL	BDL
11.	Nitrate Nitrogen (as NO ₃)	mg/L	10.0	0.77	4
12.	(NO ₂ + NO ₃)-Nitrogen	mg/L	5.0	0.77	4
13.	Free Ammonia (as NH ₃ -N)	mg/L	5.0	BDL	BDL
14.	Total Residual Chlorine	mg/L	1.0	BDL	BDL
15.	Cyanide (as CN)	mg/L	0.2	BDL	BDL
16.	Fluoride (as F)	mg/L	2.0	BDL	0.9
17.	Sulphide (as S ²⁻)	mg/L	2.0	BDL	BDL
18.	Dissolved Phosphate (as P)	mg/L	5.0	0.25	2.88
19.	Sodium Absorption Ratio	mg/L		0.68	1.06
20.	Total Coliforms	MPN index/ 100 ml	100.0	BDL	2.4 x 10 ³
21.	Faecal Coliforms	MPN index/ 100 ml	1000.0	BDL	110
22.	Total Phosphorous (as P)	mg/L	1.0	0.25	3.56
23.	Total Kjeldahl Nitrogen (as TKN)	mg/L	100.0	1.96	2.48



Location				Ridham Synthetic Pvt. Ltd.	Safe A & T Technology Pvt. Ltd.
Date of Sampling (XX/02/2017)				21	21
Sr.	Parameters	Unit	Std. Limit	Results	
24.	Total Ammonia (NH ₄ +NH ₃)-Nitrogen	mg/L	5.0	BDL	BDL
25.	Phenols (as C ₆ H ₅ OH)	mg/L	3.0	BDL	BDL
26.	Surface Active Agents (as MBAS)	mg/L	3.0	BDL	BDL
27.	Organo Chlorine Pesticides				
I.	Alachlor	µg/L	2.0	BDL	BDL
II.	Atrazine	µg/L	0.2	BDL	BDL
III.	Aldrin	µg/L	0.1	BDL	BDL
IV.	Dieldrin	µg/L	2.0	BDL	BDL
V.	Alpha HCH	µg/L	0.01	BDL	BDL
VI.	Beta HCH	µg/L	2.0	BDL	BDL
VII.	Delta HCH	µg/L	3.0	BDL	BDL
VIII.	Butachlor	µg/L	0.2	BDL	BDL
IX.	p,p DDT	µg/L	0.05	BDL	BDL
X.	o,p DDT	µg/L	100.0	BDL	BDL
XI.	p,p DDE	µg/L	250.0	BDL	BDL
XII.	o,p DDE	µg/L	30.0	BDL	BDL
XIII.	p,p DDD	µg/L		BDL	BDL
XIV.	o,p DDD	µg/L		BDL	BDL
XV.	Alpha Endosulfan	µg/L	10.0	BDL	BDL
XVI.	Beta Endosulfan	µg/L		BDL	BDL


Location				Ridham Synthetic Pvt. Ltd.	Safe A & T Technology Pvt. Ltd.
Date of Sampling (XX/02/2017)				21	21
Sr.	Parameters	Unit	Std. Limit	Results	
XVII.	Endosulfan Sulphate	µg/L	5.0	BDL	BDL
XVIII.	Y HCH (Lindane)	µg/L	1.0	BDL	BDL
28.	Polynuclear aromatic hydrocarbons (as PAH)	mg/L	0.2	0.25	0.13
29.	Polychlorinated Biphenyls (PCB)	mg/L	2.0	BDL	BDL
30.	Zinc (as Zn)	mg/L	5.0	0.06	0.16
31.	Nickel (as Ni)	mg/L	3.0	BDL	BDL
32.	Copper (as Cu)	mg/L		0.03	0.06
33.	Hexavalent Chromium (as Cr ⁶⁺)	mg/L	0.1	BDL	BDL
34.	Total Chromium (as Cr)	mg/L	2.0	BDL	BDL
35.	Total Arsenic (as As)	mg/L	0.2	BDL	BDL
36.	Lead (as Pb)	mg/L	0.1	BDL	0.01
37.	Cadmium (as Cd)	mg/L	2.0	BDL	BDL
38.	Mercury (as Hg)	mg/L	0.01	0.004	BDL
39.	Manganese (as Mn)	mg/L	2.0	BDL	3.78
40.	Iron (as Fe)	mg/L	3.0	BDL	BDL

Location				Ridham Synthetic Pvt. Ltd.	Safe A & T Technology Pvt. Ltd.
Date of Sampling (XX/02/2017)				21	21
Sr.	Parameters	Unit	Std. Limit	Results	
41.	Vanadium (as V)	mg/L	0.2	BDL	0.05
42.	Selenium (as Se)	mg/L	0.05	BDL	BDL
43.	Boron (as B)	mg/L		BDL	0.24
44.	Bioassay Test on fish	% survival	90% survival after 96h in 100%effluent	100	100

Graphs: Water/Waste Water Quality Monitoring for Dombivli MIDC:

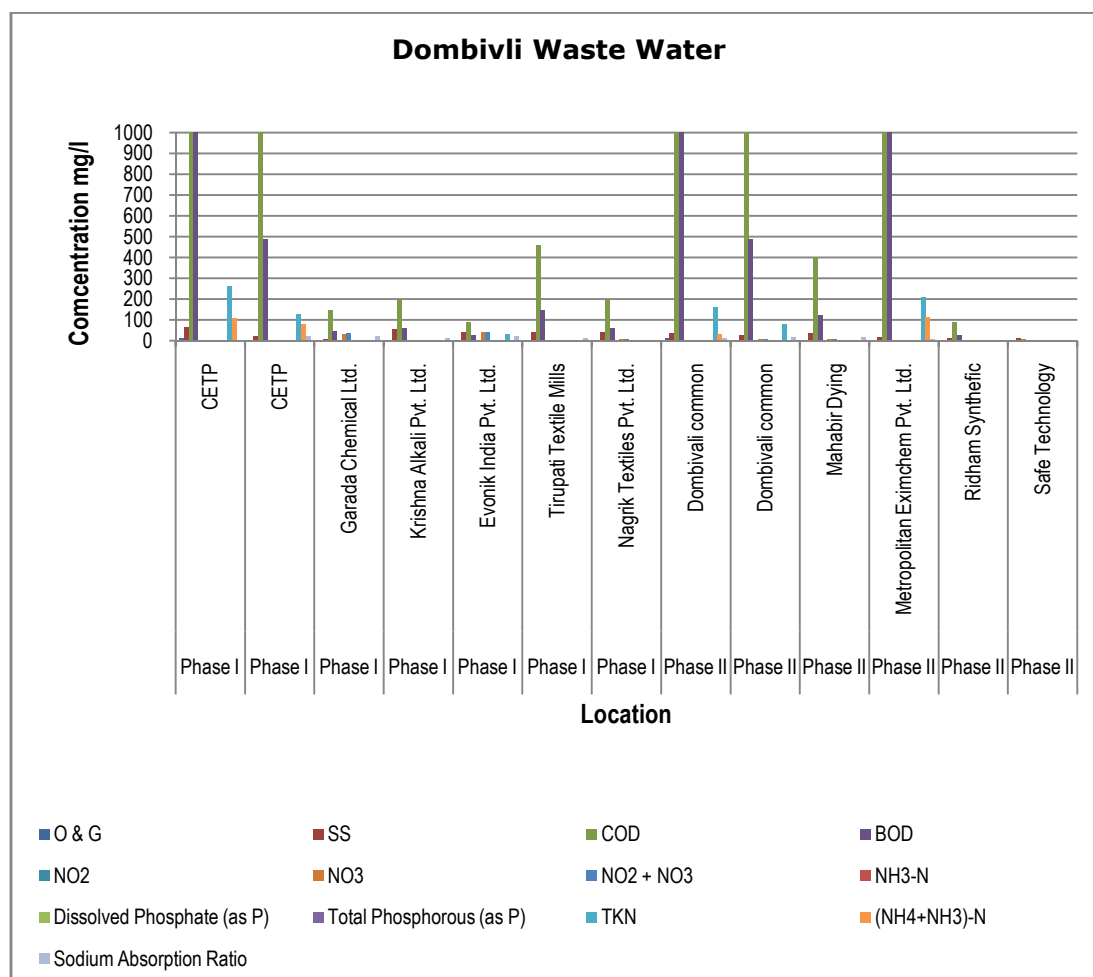

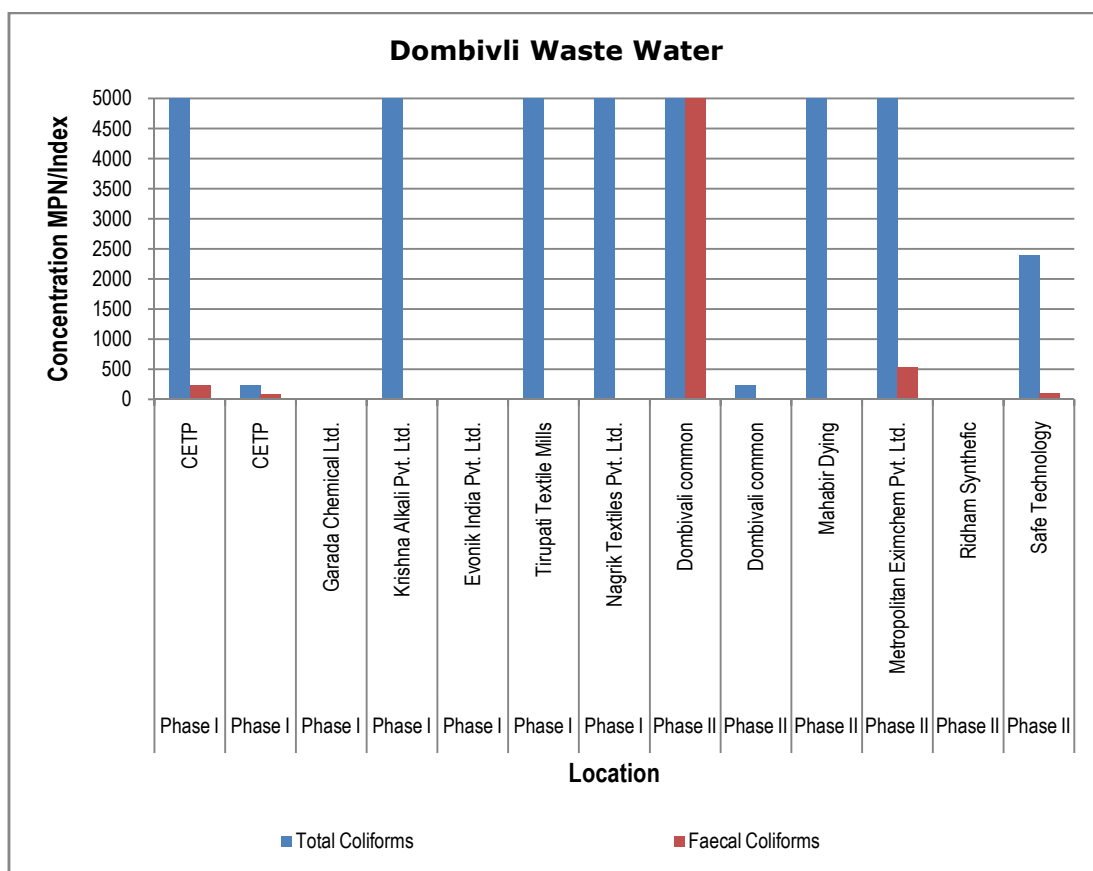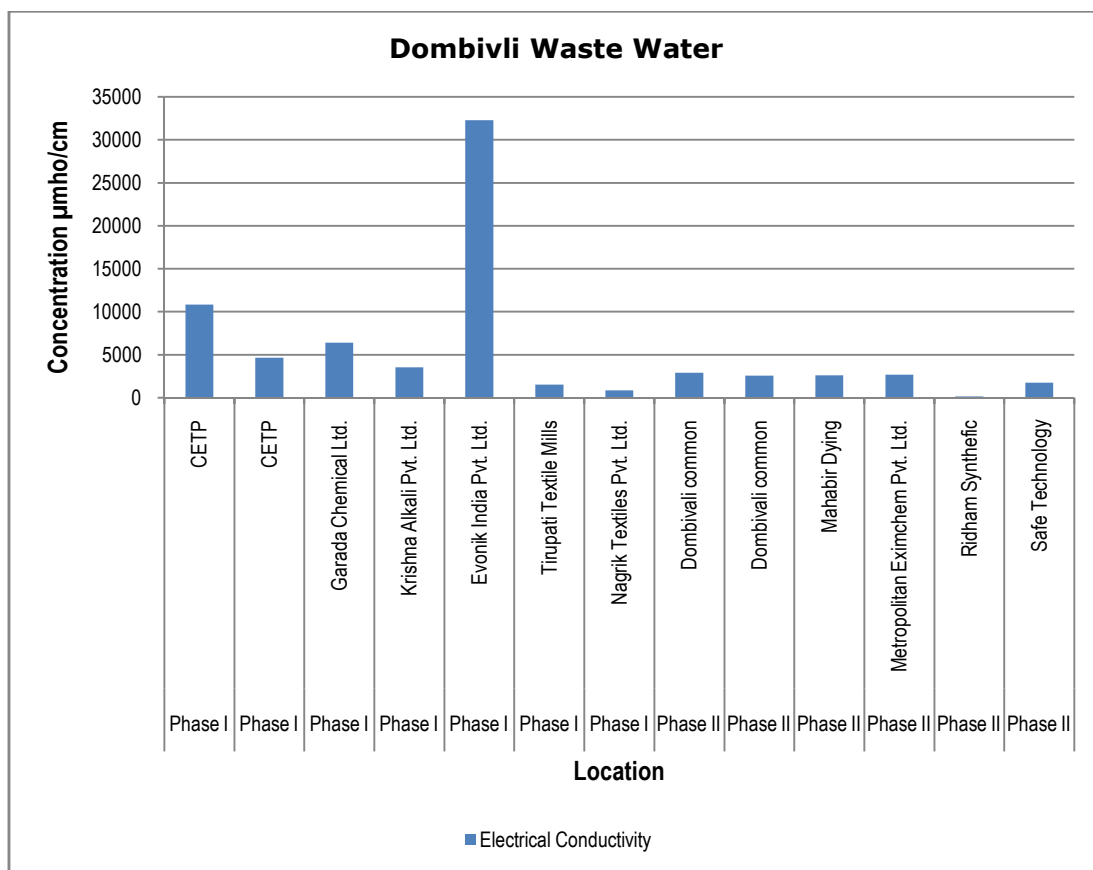

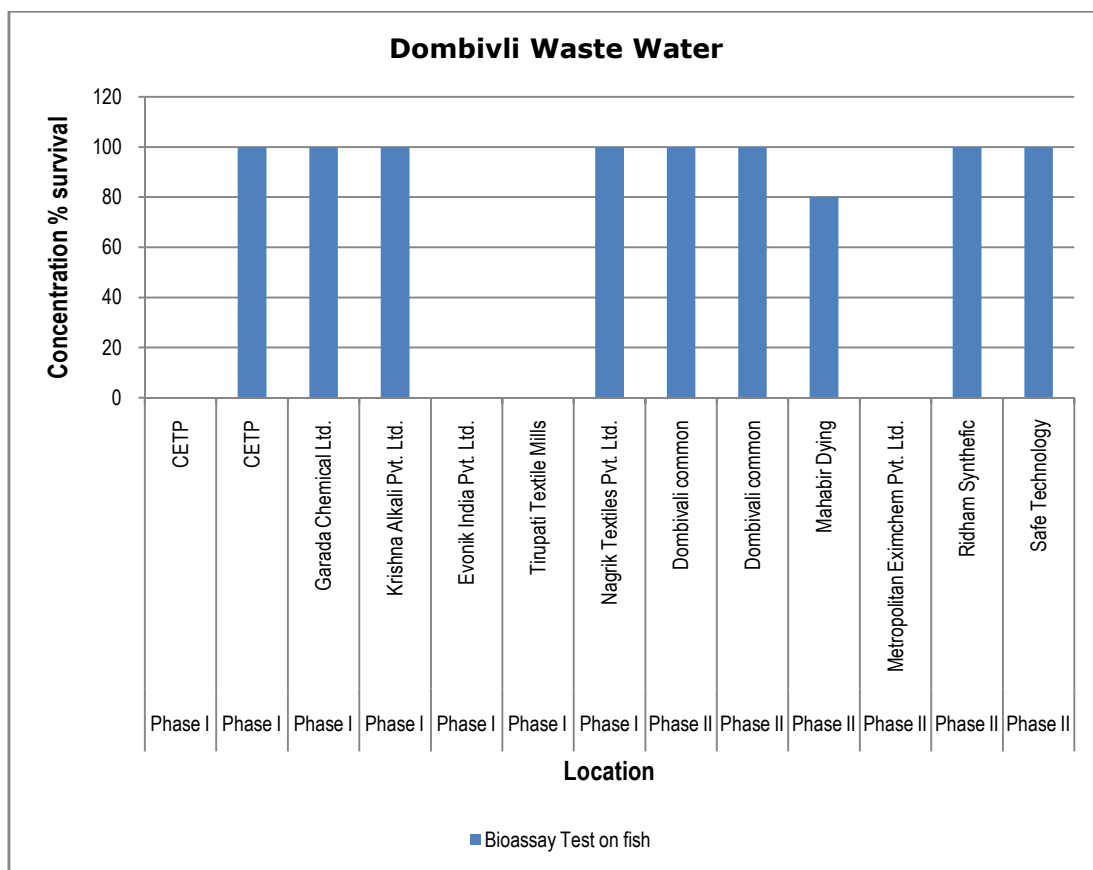

3.4 Ground Water Quality:

Sr.	Location	Source	Phase	Table No.
1.	Thakurli Talav (Chole Gaon)	Lake Water (talav)	Phase I	I
2.	Gavdevi Talav	Well Water	Phase I	I
3.	Mhasoba Devstan Talav	Well Water	Phase I	I
4.	Horizon Mall	Borewell water	Phase II	II
5.	Lodha Vihar	Borewell water	Phase II	II
6.	Pipleshwar Mandir	Borewell water	Phase II	II

Table No. I

Location				Thakurli Talav (Chole Gaon)	Gavdevi Talav	Mhasoba Devstan Talav
Date of Sampling (XX/02/2017)				24	24	24
Sr.	Parameters	Unit	Std. Limit	Results		
1.	Colour	Hazen		1	1	1
2.	Smell	-	Agreeable	Agreeable	Agreeable	Agreeable
3.	pH	-	6.5-8.5	7.04	7.1	7.65
4.	Oil & Grease	mg/L		BDL	BDL	BDL
5.	Suspended Solids	mg/L	100	7	8	7
6.	Dissolved Oxygen (%Saturation)	%		30	37	90
7.	Chemical Oxygen Demand	mg/L	500	63	32	40
8.	Biochemical Oxygen Demand (3 days, 27°C)	mg/L	10 (WHO, 1993)	20	9.7	12.2
9.	Electrical Conductivity (at 25°C)	µmho/cm	6 (WHO, 1993)	1869	1930	963
10.	Nitrite Nitrogen (as NO ₂)	mg/L	0.3 (WHO, 1993)	0.01	0.01	BDL
11.	Nitrate Nitrogen (as NO ₃)	mg/L		3.43	3.35	1.96
12.	(NO ₂ + NO ₃)-Nitrogen	mg/L	45	3.44	3.36	1.96
13.	Free Ammonia (as NH ₃ -N)	mg/L	1.0	BDL	BDL	BDL
14.	Total Residual Chlorine	mg/L	0.5	BDL	BDL	BDL

Location				Thakurli Talav (Chole Gaon)	Gavdevi Talav	Mhasoba Devstan Talav
Date of Sampling (XX/02/2017)				24	24	24
Sr.	Parameters	Unit	Std. Limit	Results		
15.	Cyanide (as CN)	mg/L	0.2	BDL	BDL	BDL
16.	Fluoride (as F)	mg/L		0.5	0.08	0.2
17.	Sulphide (as S ²⁻)	mg/L	1	BDL	BDL	BDL
18.	Dissolved Phosphate (as P)	mg/L	0.05	0.08	BDL	BDL
19.	Sodium Absorption Ratio	mg/L		0.58	1.48	1.36
20.	Total Coliforms	MPN index/ 100 ml		49	240	920
21.	Faecal Coliforms	MPN index/ 100 ml	ND	14	79	170
22.	Total Phosphorous (as P)	mg/L	ND	0.23	BDL	BDL
23.	Total Kjeldahl Nitrogen	mg/L	0.5	2.08	0.92	1.15
24.	Total Ammonia (NH ₄ +NH ₃)-Nitrogen	mg/L	0.001	0.53	BDL	BDL
25.	Phenols (as C ₆ H ₅ OH)	mg/L	0.5	BDL	BDL	BDL
26.	Surface Active Agents (as MBAS)	mg/L	0.001	BDL	BDL	BDL
27.	Organo Chlorine Pesticides					
I.	Alachlor	µg/L	0.05	BDL	BDL	BDL
II.	Atrazine	µg/L	20	0.044	0.048	0.083
III.	Aldrin	µg/L	2	BDL	BDL	BDL

Location				Thakurli Talav (Chole Gaon)	Gavdevi Talav	Mhasoba Devstan Talav
Date of Sampling (XX/02/2017)				24	24	24
Sr.	Parameters	Unit	Std. Limit	Results		
IV.	Dieldrin	µg/L	0.03	BDL	BDL	BDL
V.	Alpha HCH	µg/L	0.03	0.027	0.018	0.028
VI.	Beta HCH	µg/L	0.01	BDL	0.086	0.12
VII.	Delta HCH	µg/L	0.04	BDL	BDL	BDL
VIII.	Butachlor	µg/L	125	BDL	BDL	BDL
IX.	p,p DDT	µg/L	0.04	BDL	BDL	BDL
X.	o,p DDT	µg/L	1	BDL	BDL	BDL
XI.	p,p DDE	µg/L	1	0.016	0.027	0.017
XII.	o,p DDE	µg/L	1	0.016	0.027	0.017
XIII.	p,p DDD	µg/L	1	0.012	0.021	0.016
XIV.	o,p DDD	µg/L	1	0.012	0.021	0.016
XV.	Alpha Endosulfan	µg/L	1	BDL	BDL	BDL
XVI.	Beta Endosulfan	µg/L	0.4	BDL	BDL	BDL
XVII.	Endosulfan Sulphate	µg/L	0.4	BDL	BDL	BDL
XVIII.	Y HCH (Lindane)	µg/L	0.4	BDL	BDL	BDL
28.	Polynuclear aromatic hydrocarbons (as PAH)	mg/L	2.0	BDL	BDL	0.01
29.	Polychlorinated Biphenyls (PCB)	mg/L	0.0001	BDL	BDL	BDL
30.	Zinc (as Zn)	mg/L	0.0005	BDL	BDL	BDL
31.	Nickel (as Ni)	mg/L	5.0	BDL	BDL	BDL
32.	Copper (as Cu)	mg/L	0.02	BDL	BDL	BDL

Location				Thakurli Talav (Chole Gaon)	Gavdevi Talav	Mhasoba Devstan Talav
Date of Sampling (XX/02/2017)				24	24	24
Sr.	Parameters	Unit	Std. Limit	Results		
33.	Hexavalent Chromium (as Cr ⁶⁺)	mg/L	0.05	BDL	BDL	BDL
34.	Total Chromium (as Cr)	mg/L	1	BDL	BDL	BDL
35.	Total Arsenic (as As)	mg/L	0.05	BDL	BDL	BDL
36.	Lead (as Pb)	mg/L	0.01	BDL	BDL	BDL
37.	Cadmium (as Cd)	mg/L	0.01	BDL	BDL	BDL
38.	Mercury (as Hg)	mg/L	0.003	BDL	BDL	BDL
39.	Manganese (as Mn)	mg/L	0.001	0.09	0.18	0.06
40.	Iron (as Fe)	mg/L	0.1	BDL	BDL	BDL
41.	Vanadium (as V)	mg/L	0.3	BDL	BDL	BDL
42.	Selenium (as Se)	mg/L		BDL	0.006	BDL
43.	Boron (as B)	mg/L	0.01	BDL	0.15	0.11
44.	Bioassay Test on fish	% survival		100	100	100

Table No. II



Location				Horizon Mall	Lodha Vihar	Pipleshwar Mandir
Date of Sampling (XX/02/2017)				22	22	22
Sr.	Parameters	Unit	Std. Limit	Results		
1.	Colour	Hazen		1	1	1
2.	Smell	-	Agreeable	Agreeable	Agreeable	Agreeable
3.	pH	-	6.5-8.5	6.9	7.24	6.61
4.	Oil & Grease	mg/L		BDL	BDL	BDL
5.	Suspended Solids	mg/L	100	6	5	6
6.	Dissolved Oxygen (%Saturation)	%		48	90	45
7.	Chemical Oxygen Demand	mg/L	500	31	28	77
8.	Biochemical Oxygen Demand (3 days, 27°C)	mg/L	10 (WHO, 1993)	9.41	8.53	23.4
9.	Electrical Conductivity (at 25°C)	µmho/cm	6 (WHO, 1993)	603	1083	2070
10.	Nitrite Nitrogen (as NO ₂)	mg/L	0.3 (WHO, 1993)	0.28	BDL	BDL
11.	Nitrate Nitrogen (as NO ₃)	mg/L		1.27	1.31	2.83
12.	(NO ₂ + NO ₃)-Nitrogen	mg/L	45	1.55	1.31	2.83
13.	Free Ammonia (as NH ₃ -N)	mg/L	1.0	BDL	BDL	BDL
14.	Total Residual Chlorine	mg/L	0.5	BDL	BDL	BDL
15.	Cyanide (as CN)	mg/L	0.2	BDL	BDL	BDL



Location				Horizon Mall	Lodha Vihar	Pipleshwar Mandir
Date of Sampling (XX/02/2017)				22	22	22
Sr.	Parameters	Unit	Std. Limit	Results		
16.	Fluoride (as F)	mg/L		0.36	0.12	0.54
17.	Sulphide (as S ²⁻)	mg/L	1	BDL	BDL	BDL
18.	Dissolved Phosphate (as P)	mg/L	0.05	BDL	BDL	BDL
19.	Sodium Absorption Ratio	mg/L		0.87	1.34	1.21
20.	Total Coliforms	MPN index/ 100 ml		4.5	4.5	4.5
21.	Faecal Coliforms	MPN index/ 100 ml	ND	2	BDL	4.5
22.	Total Phosphorous (as P)	mg/L	ND	BDL	BDL	BDL
23.	Total Kjeldahl Nitrogen	mg/L	0.5	1.04	1.04	0.92
24.	Total Ammonia (NH ₄ +NH ₃)-Nitrogen	mg/L	0.001	BDL	BDL	BDL
25.	Phenols (as C ₆ H ₅ OH)	mg/L	0.5	BDL	BDL	BDL
26.	Surface Active Agents (as MBAS)	mg/L	0.001	BDL	BDL	BDL
27.	Organo Chlorine Pesticides					
I.	Alachlor	µg/L	0.05	BDL	BDL	BDL
II.	Atrazine	µg/L	20	BDL	BDL	BDL
III.	Aldrin	µg/L	2	BDL	BDL	BDL
IV.	Dieldrin	µg/L	0.03	BDL	BDL	BDL
V.	Alpha HCH	µg/L	0.03	BDL	BDL	BDL

Location				Horizon Mall	Lodha Vihar	Pipleshwar Mandir
Date of Sampling (XX/02/2017)				22	22	22
Sr.	Parameters	Unit	Std. Limit	Results		
VI.	Beta HCH	µg/L	0.01	BDL	BDL	BDL
VII.	Delta HCH	µg/L	0.04	BDL	BDL	BDL
VIII.	Butachlor	µg/L	125	BDL	BDL	BDL
IX.	p,p DDT	µg/L	0.04	BDL	BDL	BDL
X.	o,p DDT	µg/L	1	BDL	BDL	BDL
XI.	p,p DDE	µg/L	1	0.01	BDL	BDL
XII.	o,p DDE	µg/L	1	0.01	BDL	BDL
XIII.	p,p DDD	µg/L	1	BDL	BDL	BDL
XIV.	o,p DDD	µg/L	1	BDL	BDL	BDL
XV.	Alpha Endosulfan	µg/L	1	BDL	BDL	BDL
XVI.	Beta Endosulfan	µg/L	0.4	BDL	BDL	BDL
XVII.	Endosulfan Sulphate	µg/L	0.4	BDL	BDL	BDL
XVIII.	Y HCH (Lindane)	µg/L	0.4	BDL	BDL	BDL
28.	Polynuclear aromatic hydrocarbons (as PAH)	mg/L	2.0	BDL	BDL	BDL
29.	Polychlorinated Biphenyls (PCB)	mg/L	0.0001	BDL	BDL	BDL
30.	Zinc (as Zn)	mg/L	0.0005	BDL	BDL	BDL
31.	Nickel (as Ni)	mg/L	5.0	BDL	BDL	0.08
32.	Copper (as Cu)	mg/L	0.02	BDL	BDL	BDL
33.	Hexavalent Chromium (as Cr ⁶⁺)	mg/L	0.05	BDL	BDL	BDL

Location				Horizon Mall	Lodha Vihar	Pipleshwar Mandir
Date of Sampling (XX/02/2017)				22	22	22
Sr.	Parameters	Unit	Std. Limit	Results		
34.	Total Chromium (as Cr)	mg/L	1	BDL	BDL	BDL
35.	Total Arsenic (as As)	mg/L	0.05	BDL	BDL	BDL
36.	Lead (as Pb)	mg/L	0.01	BDL	BDL	BDL
37.	Cadmium (as Cd)	mg/L	0.01	BDL	BDL	BDL
38.	Mercury (as Hg)	mg/L	0.003	BDL	BDL	BDL
39.	Manganese (as Mn)	mg/L	0.001	0.2	BDL	5.38
40.	Iron (as Fe)	mg/L	0.1	BDL	BDL	BDL
41.	Vanadium (as V)	mg/L	0.3	0.04	BDL	BDL
42.	Selenium (as Se)	mg/L		BDL	BDL	BDL
43.	Boron (as B)	mg/L	0.01	BDL	BDL	BDL
44.	Bioassay Test on fish	% survival		0	80	100

Graphs: Ground Water Quality Monitoring for Dombivli MIDC:

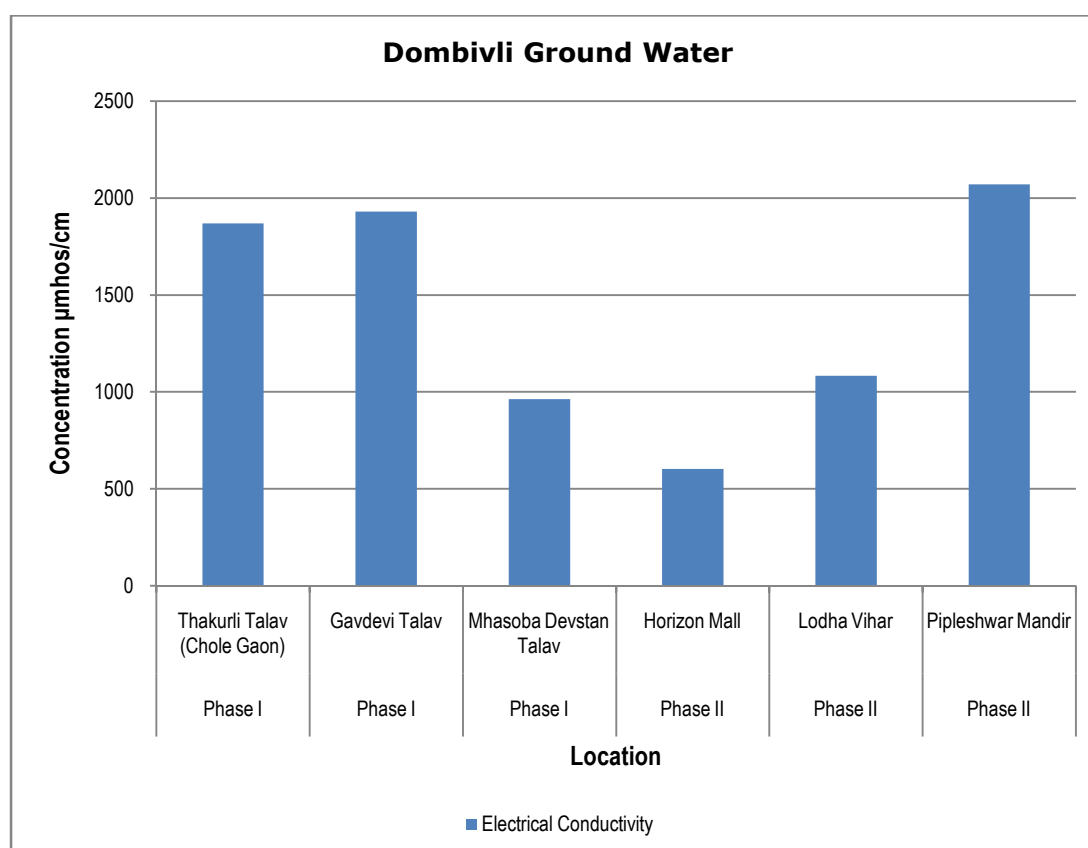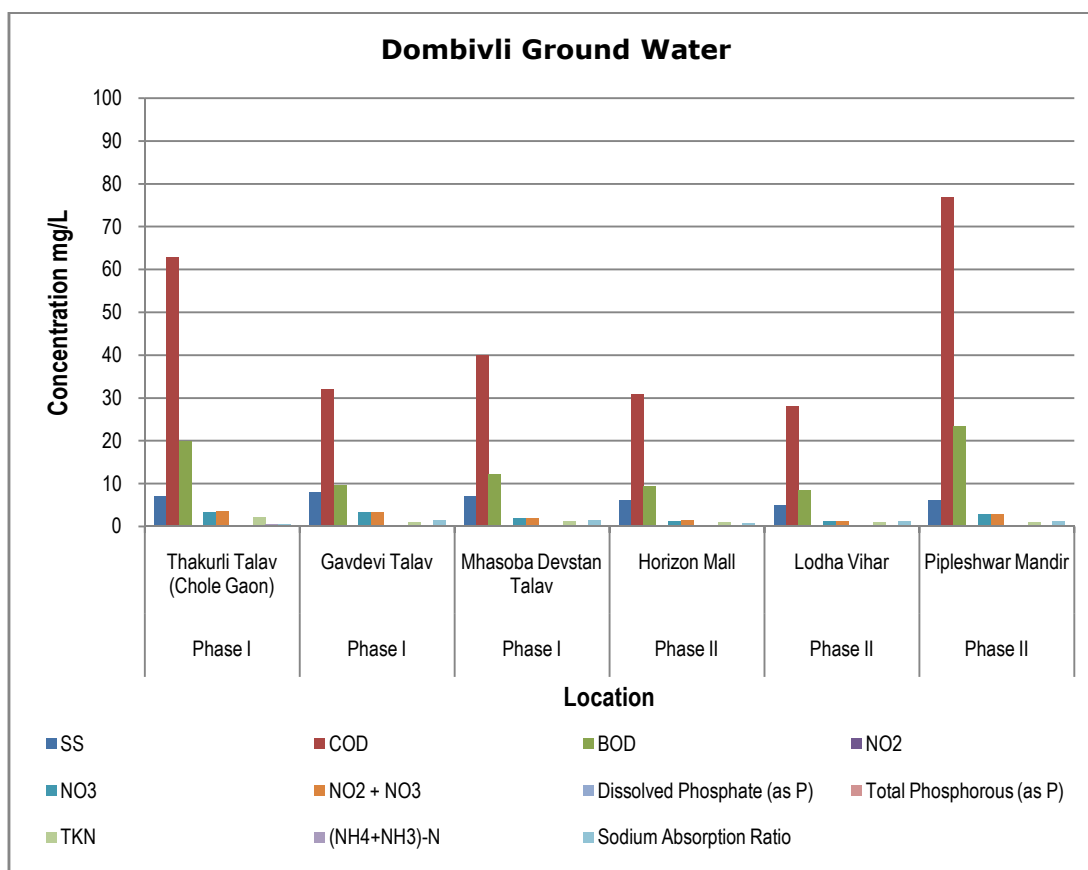

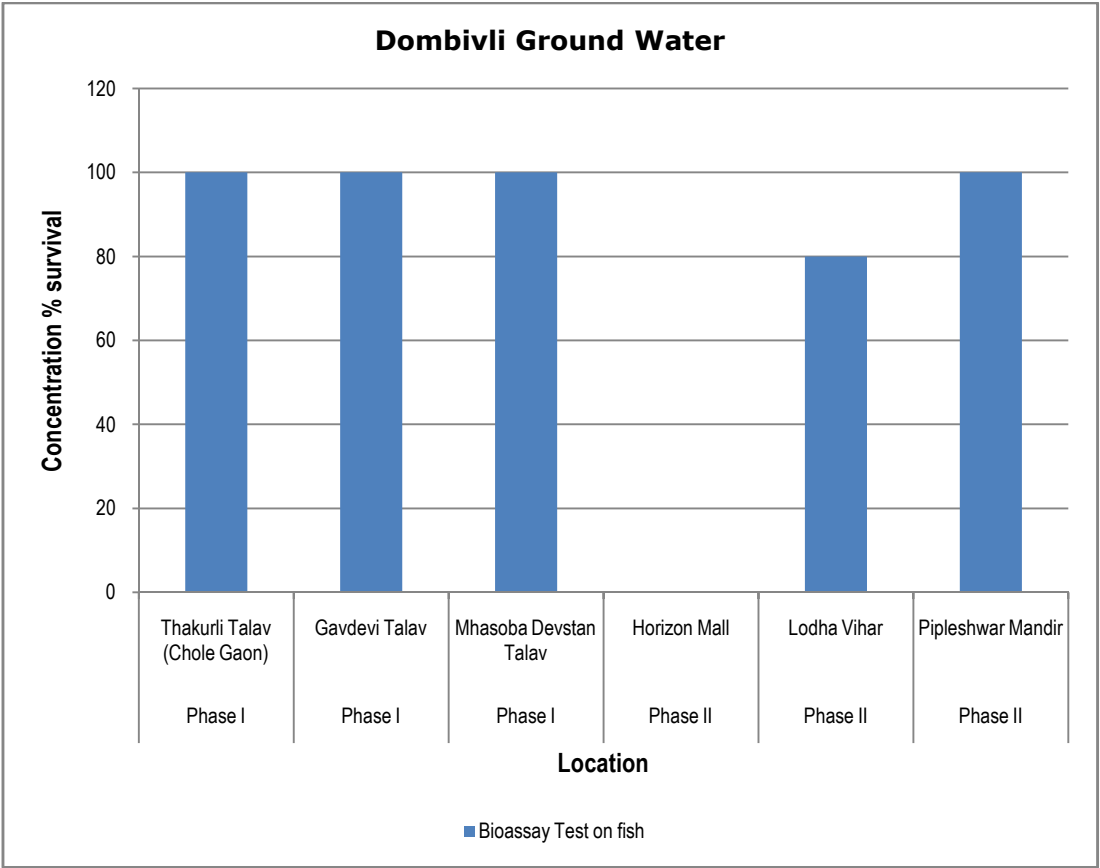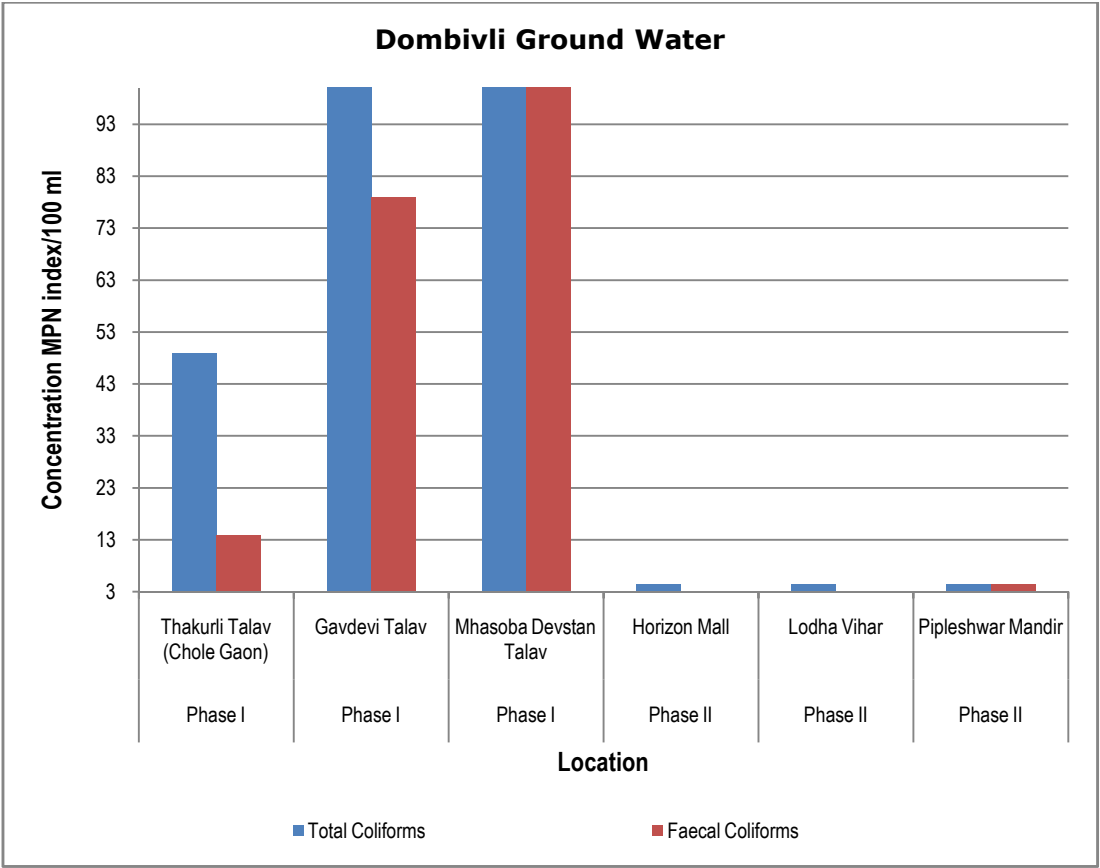

4. Summary of the results

Based on the study done, the results are summarised and concluded as follows:

4.1 Stack Emission Monitoring:

Six industries from Phase I and six industries from Phase II were selected for Stack emission monitoring. Also VOC sample of three stack of Phase I was collected.

- 1. Particulate matter (PM):** Out the 12 stacks; Particulate matter was collected only from 7 stacks. All the results obtained are within the standard emission for the specified industry. The highest range of Particulate matter was observed at Padmavati Synthetics with 59 mg/Nm^3 .
- 2. Sulphur dioxide (SO₂):** SO₂ was sampled from 8 stacks out of the 12 stacks, in which the result of two stacks was below the detectable limit. All industries result is within the limits and the highest range was observed at Auchtel Products Ltd. with 68.9 mg/Nm^3 .
- 3. Nitrogen dioxide (NO₂):** NO₂ was sampled from 7 stacks out of the 12 stacks. The result of boiler stack emission of Navrang Dyeing Pvt. Ltd., Padmavati Synthetics, Metropolitan Eximchem Pvt. Ltd. was beyond the prescribed standard limit of the respective type of industry.
- 4. Hydrogen Chloride (HCL):** HCL sample was collected only for 4 stacks. Arch Pharma Lab Ltd. was found to emit beyond the prescribed limit with 59 mg/Nm^3 .
- 5. VOC:** Only Benzene and Toulene was detected in the three stacks monitored. The range of benzene was observed between 2.15 mg/Nm^3 to 2.45 mg/Nm^3 and that of Toulene was observed between 8.5 mg/Nm^3 to 12.5 mg/Nm^3 .

4.2 Ambient Air Quality Monitoring:

Six ambient air samples was collected from Phase I and six samples was collected from Phase II of Dombivli region. The parameters monitored were studied as per the NAAQ standards. The variations of each parameter within the area under study are discussed below:

- 1. Sulphur dioxide (SO₂):** All the locations are observed with very low concentrations of SO₂, with 5 stacks out of the 12 stacks showed results below the detection limit. The highest level of SO₂ was observed at Suvishrhu Speciality Chemicals Pvt. Ltd. with $8.92 \text{ } \mu\text{g/m}^3$ which is very much lower than the standard limit of NAAQS i.e. $80 \text{ } \mu\text{g/m}^3$.
- 2. Nitrogen dioxide (NO₂):** Values of nitrogen dioxide are also observed below the standard limit of $80 \text{ } \mu\text{g/m}^3$ at all the 12 locations. The highest level of NO₂ was observed at Dombivli Better Environment System Association CETP with a result of $32.4 \text{ } \mu\text{g/m}^3$.
- 3. Particulate Matter (PM₁₀):** All 12 sampled locations in Dombivli region showed higher level of PM₁₀ concentration than the standard limit of NAAQS. The level of PM₁₀ emission ranged from $301 \text{ } \mu\text{g/m}^3$ at CETP MIDC Phase II to $491 \text{ } \mu\text{g/m}^3$ at KAMA Office.
- 4. Particulate Matter (PM_{2.5}):** Like PM_{2.5}, all 12 sampled locations in Dombivli region showed higher level of PM_{2.5} concentration than the standard limit of NAAQS. The

level of PM_{2.5} emission ranged from 70 µg/m³ both at Arch Pharma Lab Ltd. and Dhanlaxmi Fabrics Ltd. to 123 µg/m³ at KAMA Office.

5. **Ozone (O₃):** Out of the 12 locations monitored, only one location was detected with O₃ of 30.5 µg/m³ which is well within the standard limit of 180 µg/m³ as per NAAQS.
6. **Lead (Pb):** The standard limit of Pb is 1 µg/m³ as per NAAQS. Two location out of 12 location monitored was observed exceeding limit of Pb concentration with 1.44 µg/m³ and 1.54 µg/m³ at Aarti Industries Ltd. and Suvishrhu Speciality Chemicals Pvt. Ltd. respectively
7. **Carbon Monoxide (CO):** Concentration of carbon monoxide has been found to well within the limits in all 12 locations monitored.
8. **Ammonia (NH₃):** Ammonia was below the detectable limit in 7 locations out of the 12 locations monitored. The level of NH₃ ranged in between 60.5 µg/m³ to 225 µg/m³.
9. **Benzene (C₆H₆):** Out of 12 locations monitored, 5 locations was having benzene below the detection limit. But Dombivli Better Environment System Association CETP, Auchtel Products Ltd., Zenith industrial Rubber Product Pvt. Ltd. and Dhanlaxmi Fabrics Ltd. the level of Benzene exceeded with 13.5 µg/m³, 5.91 µg/m³, 18.2 µg/m³ and 25.7 µg/m³ respectively
10. **Benzo(a)pyrene (BaP):** BaP was below detectable limit in all 12 locations monitored.
11. **Arsenic (As):** As was also below detectable limit in all 12 locations monitored.
12. **Nickel (Ni):** Concentration of Nickel was higher than its permissible limit of 20ng/m³ at 4 locations monitored.

4.3 Waste Water Quality Monitoring:

To understand the quality of treated effluent, samples were collected from 7 industries of Phase I and 6 industries of Phase II Dombivli. Considering the general parameters of all the industries mentioned, following are the conclusions:

1. **Colour:** Colour units are found high with more than 100 Hazen unit in 9 water sample collected.
2. **Odour:** odour of all the samples is found disagreeable at 6 water samples collected.
3. **pH:** it is observed in between 5.75 and 7.88 which is well within the range.
4. **Suspended Solids:** Suspended solids of all 13 water sample is well within the limits and ranged in between 9 mg/L to 64 mg/L.
5. **Chemical Oxygen Demand:** Out of all samples collected, 8 samples exceeded the limit required as per standard. The highest COD was observed at Dombivli common inlet with 6000 mg/L concentration.
6. **Biochemical Oxygen Demand:** 10 out of the 13 samples collected was exceeding the limit required as per standard of BOD. The highest BOD was observed at Dombivli common outlet with 1886 mg/L concentration.

- 7. Sulphide:** 7 samples collected detected high level of Sulphide ranging in between 11.2 mg/L to 77.6 mg/L. The remaining 6 locations had Sulphide concentration lesser than the detectable range.
- 8. Total Ammonia:** 4 water samples collected had high concentration of Ammonia ranging in between 30 mg/L to 115 mg/L.
- 9. Total Kjeldahl Nitrogen:** 4 water samples collected had high concentration of TKN ranging in between 127 mg/L to 260 mg/L.
- 10. Fish Bioassay:** 100% Survival was attained in 8 water samples collected for Bioassay test and in 4 water samples, no fishes survived at all.
- 11. Heavy metals:** All the heavy metals are found below the standard limits in all the samples.

4.3 Ground Water Quality Monitoring:

Three ground water samples were collected from Phase I and three was collected from Phase II of Dombivli.

- 1) Colour** (Hazen Units): Colour units are below the acceptable standard of all water samples collected.
- 2) Odour:** odour of all the samples is found agreeable.
- 3) Chemical Oxygen Demand:** The COD of all 6 samples exceeded and was found in the range between 28 mg/L to 77 mg/L.
- 4) Biological Oxygen Demand:** BOD of all 6 samples also exceeded and was found in the range between 8.53 mg/L to 23.4 mg/L.

Following are the parameters which are compared with ISO 10500:2012 Drinking water specifications.

- 1) Nitrite:** Values of Nitrite are at below detection level except for Horizon Mall Borewell water sample.
- 2) Nitrate:** Results of Nitrate are also observed below standard limit (45mg/l). It is observed in the range of 1.27 mg/L to 3.43 mg/L.
- 3) Residual Free Chlorine:** Values are below the acceptable standards.
- 4) Total Ammonia:** Values are below the acceptable standards in all regions except for Thakurli Talav lake water which showed 0.53 mg/L concentration.
- 5) Fluoride:** Values are below the acceptable standards, below <0.05mg/L.
- 6) Sulphide:** All the readings of sulphide are observed below the detectable limit.
- 7) Sodium Absorption Ratio:** These values fit within range of water quality criteria of CPCB.
- 8) Total Kjeldahl nitrogen:** All 6 water sample collected exceeded the standard limit of TKN and ranged in between 0.92 mg/L to 2.08 mg/L concentration.

9) Fish Bioassay: The Horizon mall borewell water sample 0% survival was obtained and at Lodha Vihar borewell water sample 80% survival was observed. Remaining all location 100% survival was observed.

10) *Boron: Values are below the acceptable standards.

(* CPCB Water Quality criteria for Irrigation, Industrial Cooling & Controlled Waste disposal).

11) Surface Active Agents: It exceeds the standard of drinking water.

12) Metals: All the metals except manganese at few locations are observed within the acceptable limits of drinking water standards.

5. CEPI Score

Comprehensive Environmental Pollution Index (CEPI) is intended to act as early warning tool which helps in categorization of industrial clusters/areas in terms of priority of needing attention. CPCB had evolved certain methodology to calculate CEPI, in which a score has been fixed for different environmental components based on the level of pollution. The scoring system involves an algorithm that takes into account the basic selection criteria. This approach is based on the basic hazard assessment logic that can be summarized as below.

Hazard = pollutant source, pathways, and receptor

CPCB has calculated CEPI for the identified critically polluted industrial clusters in 2009. It is calculated separately for air, water, and land. The basic framework and scoring system of the CEPI – based on three factors namely pollutant, pathway, and receptor – has been described below.

Based on Sub-index Score (score of individual environmental component like air, water etc.):

- **Score more than 63:** A Critical Level of Pollution in the respective level of environmental component
- **Score between 51-63:** Severe to critical level of pollution with reference to respective environmental component

Cut-off Score

- **Score 50:** Severely Polluted Industrial Clusters/areas
- **Score 60:** Critically Polluted Industrial Clusters/areas

Based on Aggregated CEPI Score (score includes sub-index score of all individual environmental components together):

- **Aggregated CEPI score >70:** Critically polluted areas

- **Aggregated CEPI score between 60-70:** Severely polluted areas

Since the inception of the programme, MPCB has also formulated Action Plans to mitigate the environmental pollution problems for each of the 8 Critically Polluted Areas (CPAs) in Maharashtra. Based on available information, parameters selected and monitored in continuation with this, CEPI has been calculated and Short Term Action Plan (STAP) as well as Long Term Action Plan (LTAP) was prepared in 2010.

Subsequently NAAQS 2009 came in force. List of parameters to be considered increased and expanded including more critical and hazardous pollutants like benzene, BaP, Metals, etc. existing in the environment. There was revision of standards (limiting values) as well. In this present report of 2016 prepared by MPCB, CEPI is calculated considering all these revised standards' limiting values, list of parameters and complete scope of monitoring.

Below given Table shows aggregated CEPI of present report in comparison with the CEPI Score 2013 and CPCB report (2009).

1. CEPI score by CPCB in 2009
2. CEPI score 2013
(considering all revised standards, scope and limiting values of 2013)
3. CEPI score MPCB 2016, (considering all parameters)
4. CEPI score MPCB 2017, this report (considering all parameters)

The result shows that CEPI score of present report is 65.82, which is very much higher than the CEPI score of 2016 studies (49.96). The main reason behind the variation in the result is because the sampling of CEPI 2016 was carried out in monsoon season (July month). During monsoon, pollutants load gets decreased in air as well as in water bodies due to dilution, which results in lower concentration of pollutants in a particular sample. However, the present study was carried out in post monsoon (February month), which again increased the concentration of pollutants in the environment and hence resulted in higher CEPI score as compared to August, 2016 score.

However, it should also be noticed over here that MPCB's efforts through the formulation of action plans decreased the overall concentration of pollutants in all aspects i.e. air, land and water in Dombivli area in past three years. This has also resulted in decreased score of CEPI now.

5.1 Comparison of CEPI scores:

Results show that present CEPI score (65.82) of Dombivli considering all revised standards is lesser than the CEPI Score of 2013 (89.90) report.

Detailed results of Air, Water and Land are given below:

Air

	A1	A2	A	B1	B2	B3	B	C1	C2	C3	C	D	CEPI
Present Report 2017	2	5	10	5	4	3	12	4	3	0	12	15	49
CEPI score 2016	4	2	8	3	2.3	4	9.3	5	2	0	10	10	37.3
CEPI score 2013	6	5	30	6	0	0	6	5	3	0	15	15	66
CPCB Report 2009	6	5	30	6	0	0	6	5	3	0	15	15	66

Water:

	A1	A2	A	B1	B2	B3	B	C1	C2	C3	C	D	CEPI
Present Report 2017	2	5	10	8	3.3	0	11.3	5	5	5	30	10	61.3
CEPI score 2016	4	2	8	4	0	6	10	5	4	5	25	10	53
CEPI score 2013	6	5	30	8	0	3	11	5	5	5	30	10	81
CPCB Report 2009	3	5	15	8	0	3	11	5	4.5	5	27	10	63.5

Land:

	A1	A2	A	B1	B2	B3	B	C1	C2	C3	C	D	CEPI
Present Report 2017	2	5	10	7.5	1.3	0	8.8	5	4	5	25	10	53.8
CEPI score 2016	3	2	6	4	0	4.1	8.1	5	2	4	27	10	38.1
CEPI score 2013	4	5	20	7.75	1.5	3	12.25	5	4.75	5	28.75	10	71
CPCB Report 2009	3	5	15	8	1.5	3	12.5	5	3	5	20	10	57.5

Aggregated CEPI:

	Air Index	Water Index	Land Index	CEPI
Present Report 2017	49	61.3	53.8	65.82
CEPI Score 2016	37.3	53	38.1	49.96
CEPI score 2013	66	81	71	89.90
CPCB Report 2009	66	63.5	57.5	78.41

6. Conclusion

The industrial part of Dombivli has a number of factories manufacturing dyes, paints, and industrial and agricultural chemicals. Heavy metal factories manufacturing a wide variety of equipment are also based in this region. A few nationally prominent industrial establishments that have manufacturing plants in Dombivli are Gharda Chemicals, Vicco Labs, Lloyd Steel and Deepak Fertilizers.

The samples taken from 12 stacks from different industries in the region, only Nitrogen Dioxide have been found to have exceeded the prescribed limit. The main reason of the increase in nitrogen dioxide in the region is due to fossil fuel combustion processes. We will be taking necessary steps for controlling and reducing its exposure.

12 ambient air samples were collected from different locations in the region. The concentration of PM₁₀ was high at all 12 location sampled and PM_{2.5} was high at 9 locations sampled. The main reason for the increase in the concentration of Particulate matter is the increase in traffic and crowd. The concentration of Benzene was also increased in two locations monitored which is also from vehicle exhaust and other combustion processes of the industries nearby. The Nickel concentration in four locations monitored was also found to be high. The Nickel in ambient air is produced mainly due to municipal waste incineration, combustion of coal and heavy fuel oil in industries and windblown dust also as Nickel is found naturally in the earth's crust (in various forms such as nickel sulphides and oxides), and is present in small quantities in soils, aquatic environments, and vegetation.

Thirteen waste water samples were collected from different ETP outlets in various industries located in the region and also from CEPT inlet and outlet of both Phase I and Phase II were collected. Parameters like Oil & Grease, Chemical Oxygen Demand, Biological oxygen demand, Nitrogen, Sulphide, Total Coliforms, Faecal Coliforms and Total Kjeldhal Nitrogen was found to have exceeded the limit of disposal of treated waste water. We have informed the respective industry about the same and actions are taken for improving the quality of treated waste water before disposal.

In the ground water samples collected, Electrical Conductivity, Total Kjeldahl Nitrogen and BOD was found in higher concentration. The ground water collected is from Borewell and is not used for drinking purpose.

The State Pollution Control Board and Regional Office of SPCB are continuously initiating action against industries for reducing and controlling the pollution caused due the industries. Many industries were issued with closure direction and show cause notice for

emission control. Regular compliance of industries is monitored by Board officials for maintain the pollution reduced due to the implementation of action plan.

	A1	A2	A	B1	B2	B3	B	C1	C2	C3	C	D	CEPI
Air Index	2	5	10	5	4	3	12	4	3	0	12	15	49
Water Index	2	5	10	8	3.3	0	11.3	5	5	5	30	10	61.3
Land Index	2	5	10	7.5	1.3	0	8.8	5	4	5	25	10	53.8
Aggregated CEPI													65.82

7. Efforts taken for the reduction in pollution:

The regional office of Maharashtra pollution control board has taken various initiatives in reducing the CEPI Score of 89.90 of 2013 to 77.88 of 2017. Below mentioned are some of the efforts:

- CETP has carried performance evaluation study. On the basis of analysis report and visit, the Board has issued directions for the up gradation of CETP.
- Based on the performance evaluation of air pollution control measures in the industrial units, Board had issued closer direction & show cause notice to industry and regular compliance is monitored by Board officials.
- All industries are member of CHWTSDF & regular collection and transportation is done by CHWTSDF, Taloja. Also regular monitoring carried out by MPCB.
- For awareness of Environment pollution reduction, seminar on zero discharge from textile industry, seminar on Emission Trading Scheme etc. was carried out by Regional offices of MPCB.
- Installation of CAAQM stations and online display of AQQM data work is in process.

8. Photographs

Gopal Print Processors Pvt. Ltd. Ambient Air Monitoring



Innovative Organochem Pvt. Ltd. Ambient Air Monitoring



KAMA Office Ambient Air Monitoring



Krishna Alkali Pvt. Ltd. Ambient Air Monitoring



Auchtel products Ltd. Ambient Air Monitoring



Zenith industrial Rubber Product Pvt. Ltd. Ambient Air Monitoring



Evonik Catalysts India Pvt. Ltd. Process stack Monitoring




CEPT Inlet water sample



Evonik Catalysts India Pvt. Ltd. Waste Water Sample



Gharda Chemical Ltd. Water sample

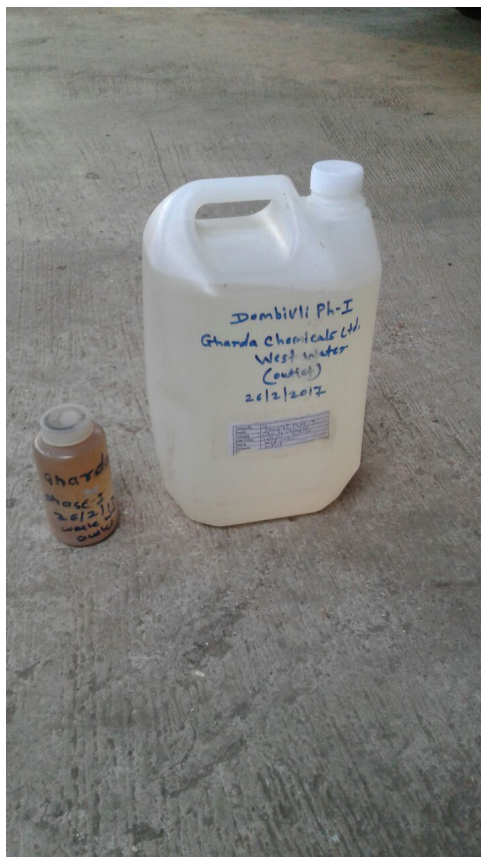

Mhasoba Devstan Talav Ground water



Nagrik Textiles Pvt. Ltd. Waste Water Sample



Thakurli Talav Ground water



Tirupati Textile Mills Waste Water Sample



9. References

- 1) Criteria for Comprehensive Environmental Assessment of Industrial Clusters, December 2009,CPCB, EIAS/4/2009-10
- 2) Comprehensive Environmental Assessment of Industrial Clusters, December 2009,CPCB, EIAS/5/2009-10
- 3) Action Plan for Industrial Cluster: Chandrapur, November 2010,MPCB
- 4) Action Plan for Industrial Cluster: Dombivli, November 2010,MPCB
- 5) Action Plan for Industrial Cluster: Aurangabad, November 2010,MPCB
- 6) Action Plan for Industrial Cluster: NaviMumbai, November 2010,MPCB
- 7) Action Plan for Industrial Cluster: Navi Mumbai, November 2010,MPCB
- 8) Standard Methods for the Examination of Water and Waste Water, American Public Health Association, 22nd Edition, 2012.
- 9) IS 3025 (various parts)
- 10) www.mpcb.gov.in
- 11) www.cpcb.gov.in

10. Annexure

Annexure I: Stack Emission Sampling and Analysis Methodology

Sr.	Parameters	Method References	Techniques	Detection Limit
1.	Acid Mist (as Sulphuric Acid)	US EPA Method no.m-8	Barium thorine titration Method	0.6 mg/Nm ³
2.	Ammonia	IS 11255 (Part 6):1999, Reaffirmed 2003	Titration/Nessler Reagent / Spectrophotometric Method	1 mg/Nm ³
3.	Carbon Monoxide	USEPA Method 10B	GC-FID Method	0.2 mg/Nm ³
4.	Chlorine	US EPA Method 26 for sampling	Titrimetric	0.001 mg/Nm ³
5.	Fluoride (Gaseous)	US EPA Method 13 A	SPADNS Zirconium Lake Spectrophotometric Method	0.025 mg/Nm ³
6.	Fluoride (Particulate)	US EPA Method 13 A	SPADNS Zirconium Lake Spectrophotometric Method	0.005 mg/Nm ³
7.	Hydrogen Chloride	US EPA Method 26 for sampling	Titrimetric	0.25 mg/Nm ³
8.	Hydrogen Sulphide	IS 11255 (Part 4):1985	Titrimetric	1 mg/Nm ³
9.	Oxides of Nitrogen	IS 11255 (Part 7): 2005	PDSA Colorimetric Method	10 mg/Nm ³
10.	Oxygen	IS 13270 : 1992	ORSAT Apparatus	1 %
11.	Poly Aromatic Hydrocarbons (Particulate)	IS 5182 (Part 12) : 2004, Reaffirmed 2009 CPCB Guidelines, May 2011, Page No.39	GC-FID Method	0.25 mg/Nm ³
12.	Suspended Particulate Matter	IS 11255 (Part 1):1985, Reaffirmed 2003	Gravimetric Method	10 mg/Nm ³

Sr.	Parameters	Method References	Techniques	Detection Limit
13.	Sulphur Dioxide	IS 11255 (Part 2): 1985, Reaffirmed 2003	Titrimetric IPA thorine Method	5.0mg/Nm ³
				0.02kg/day
14.	BTX (Benzene, Toluene, Xylene)	NIOSH (NMAM) 1501	Adsorption and Desorption followed by GC-FID analysis	0.001 mg/Nm ³
15.	VOC (Volatile Organic Compounds)	NIOSH (NMAM) 1501 for sampling	Adsorption and Desorption followed by GC-FID or GC/MS analysis	-
i	Methyl Isobutyl Ketone	-	-	0.001 mg/Nm ³
ii	Benzene	-	-	0.001 mg/Nm ³
iii	Toluene	-	-	0.001 mg/Nm ³
iv	Xylene	-	-	0.001 mg/Nm ³
v	Ethyl Benzene	-	-	0.001 mg/Nm ³
vi	Ethyl Acetate	-	-	0.001 mg/Nm ³

Annexure II: Ambient Air Sampling and Analysis Methodology

Sr.	Parameters	Method References	Techniques	Detection Limit
1.	Sulphur Dioxide (SO ₂)	CPCB Guidelines for the Measurement of Ambient Air Pollutants, Volume I, May 2011, Page No.1	Improved West & Gaeke Method	4 µg/m ³
2.	Nitrogen Dioxide (NO ₂)	CPCB Guidelines for the Measurement of Ambient Air Pollutants, Volume I, May 2011, Page No.7	Modified Jacob & Hochheiser Method	3 µg/m ³
3.	Particulate Matter (size less than 10 µm) or PM ₁₀	CPCB Guidelines for the Measurement of Ambient Air Pollutants, Volume I, May 2011, Page No.11	Gravimetric Method	2 µg/m ³
4.	Particulate Matter (size less than 2.5 µm) or PM _{2.5}	CPCB Guidelines for the Measurement of Ambient Air Pollutants, Volume I, May 2011, Page No. 15	Gravimetric Method	0.4 µg/m ³
5.	Ozone (O ₃)	APHA, Method No. 820, Page no. 836	Chemical Method	19.6 µg/m ³
6.	Lead (Pb)	CPCB Guidelines for the Measurement of Ambient Air Pollutants, Volume I, May 2011, Page No. 47	AAS Method	0.02 µg/m ³
7.	Carbon Monoxide (CO)	CPCB Guidelines for the Measurement of Ambient Air Pollutants, Volume II, May 2011, Page No. 16	Non Dispersive Infra Red (NDIR) spectroscopy	0.05 mg/m ³
8.	Ammonia (NH ₃)	CPCB Guidelines for the Measurement of Ambient Air Pollutants, Volume I, May 2011, Page No. 35	Indophenol Blue Method	4.0µg/m ³
9.	Benzene (C ₆ H ₆)	IS 5182 (Part 11):2006	Adsorption and Desorption followed by GC-FID analysis	1.0 µg/m ³
10.	Benzo (a) Pyrene (BaP) – particulate phase only,	CPCB Guidelines for the Measurement of Ambient Air Pollutants, Volume I, May 2011, Page No. 39	Solvent extraction followed by GC-FID analysis	0.2 ng/m ³

Sr.	Parameters	Method References	Techniques	Detection Limit
11.	Arsenic (As)	CPCB Guidelines for the Measurement of Ambient Air Pollutants, Volume I, May 2011, Page No. 47	AAS Method	0.3ng/m ³
12.	Nickel (Ni)	CPCB Guidelines for the Measurement of Ambient Air Pollutants, Volume I, May 2011, Page No. 47	AAS Method	3.0ng/m ³

Annexure III: Water/Wastewater Sampling and Analysis Methodology

Sr.	Parameters	Methods References	Techniques	Detection Limit
1.	Sampling Procedure for Chemical Parameters	IS 3025 (Part 1): 1987, Reaffirmed 1998, Amds.1& APHA, 22 nd Ed., 2012, 1060 B, 1-39	-	-
2.	Sampling Procedure for Microbiological Parameters	APHA, 22 nd Ed., 2012, 1060 B, 1-39, 9040, 9-17, and 9060B, 9-35	-	-
3.	Temperature	APHA, 22 nd Ed., 2012, 2550-B, 2-69	By Thermometer	-
4.	Colour	APHA, 22 nd Ed., 2012, 2120-B, 2-26	Visible Comparison Method	1 Hazen Unit
5.	Odour	IS 3025 (Part 5): 1983, Reaffirmed 2006	Qualitative Method	-
6.	pH	APHA, 22 nd Ed., 2012, 4500-H ⁺ - B, 4-92	By pH Meter	1
7.	Oil & Grease	APHA, 22 nd Ed., 2012, 5520-B, 5-40	Liquid -liquid Partition-Gravimetric Method	1.0 mg/L
8.	Suspended Solids	IS 3025(Part 17): 1984, Reaffirmed 2006,Amds.1	Filtration /Gravimetric Method	5.0 mg/L
9.	Dissolved Oxygen	IS 3025(Part 38): 1989, Reaffirmed 2009	Iodometric Method-Azide modification	0.05 mg/L
10.	Chemical Oxygen Demand	APHA, 22 nd Ed., 2012, 5220-B, 5-17	Open Reflux Method	5.0 mg/L
11.	Biochemical Oxygen Demand	IS 3025(Part 44): 1993, Reaffirmed 2009,Amds.1	Iodometric Method	5.0 mg/L
12.	Electrical Conductivity	APHA, 22 nd Ed., 2012, 2510- B, 2-54	By Conductivity Meter	0.1 μ mho/cm
13.	Nitrite-Nitrogen	APHA, 22 nd Ed., 2012, 4500-NO ₂ -B, 4-120	Colorimetric Method	0.006 mg/L

Sr.	Parameters	Methods References	Techniques	Detection Limit
14.	Nitrate-Nitrogen	APHA, 22 nd Ed., 2012, 4500-NO ₃ , B-4-122	UV Spectrophotometer Screening Method	0.2 mg/L
15.	(NO ₂ + NO ₃)-Nitrogen	APHA, 22 nd Ed., 2012, 4500-NO ₂ -B, 4-120 APHA, 22 nd Ed., 2012, 4500-NO ₃ , B-4-122	Colorimetric Method V Spectrophotometer Screening Method	0.2 mg/L
16.	Free Ammonia	APHA, 22 nd Ed., 2012, 4500 NH ₃ , F, 4-115	Colorimetric Method	0.006 mg/L
17.	Total Residual Chlorine	IS 3025 (Part 26) :1986, Reaffirmed 2009, Ed. 2.1(2004-02)	Iodometric Method	0.1 mg/L
18.	Cyanide (CN)	APHA, 22 nd Ed., 2012, 4500-CN, C & E, 4-41 & 4-43	Colorimetric Method	0.001 mg/L
19.	Fluoride (F)	APHA, 22 nd Ed., 2012, 4500-F ⁻ , D, 4-87	SPADNS Method	0.05 mg/L
20.	Sulphide (S ²⁻)	APHA, 22 nd Ed., 2012, 4500 -S ²⁻ , C-4-175, F-4-178	Iodometric Method	0.08 mg/L
21.	Dissolved Phosphate (P)	APHA, 22 nd Ed., 2012, 4500 P, E, 4-155	Ascorbic Acid Method	0.03 mg/L
22.	Sodium Absorption Ratio	IS 11624 :1986, Reaffirmed 2006	By Calculation	0.3
23.	Total Phosphorous (P)	APHA, 22 nd Ed., 2012, 4500 P, E, 4-155	Ascorbic Acid Method	0.03 mg/L
24.	Total Kjeldahl Nitrogen	APHA, 22 nd Ed., 2012, 4500 NH ₃ , B & C, 4-110, 4-112	Titrimetric Method	0.1 mg/L
25.	Total Ammonia (NH ₄ + NH ₃)-Nitrogen	APHA, 22 ^d Ed., 2012, 4500 NH ₃ , F, 4-115	Colorimetric Method	0.001 mg/L
26.	Phenols (C ₆ H ₅ OH)	APHA, 22 nd Ed., 2012, 5530- B & C, 5-44 & 5-47	Chloroform Extraction Method	0.001 mg/L

Sr.	Parameters	Methods References	Techniques	Detection Limit
27.	Surface Active Agents	APHA, 22 nd Ed., 2012 , 5540-B & C, 5-50	Methylene Blue Extraction Method	0.1 mg/L
28.	Organo Chlorine Pesticides	APHA, 22 nd Ed., 2012, 6410B, 6-74	GC MS-MS Method	0.01 µg/L
29.	Polynuclear aromatic hydrocarbons (PAH)	APHA, 22 nd Ed., 2012, 6410B, 6-74	GC MS-MS Method	0.01 µg/L
30.	Polychlorinated Biphenyls (PCB)	APHA, 22 nd Ed., 2012, 6410B, 6-74	GC MS-MS Method	0.01 µg/L
31.	Zinc (Zn)	IS 3025(Part 2): 2004	ICP Method	0.1 mg/L
32.	Nickel (Ni)	IS 3025(Part 2): 2004	ICP Method	0.05 mg/L
33.	Copper (Cu)	IS 3025(Part 2): 2004	ICP Method	0.03 mg/L
34.	Hexavalent Chromium (Cr ⁶⁺)	APHA, 22 nd Ed., 2012, 3500-Cr, B, 3-69	Colorimetric Method	0.02 mg/L
35.	Total Chromium (Cr)	IS 3025(Part 2): 2004	ICP Method	0.02 mg/L
36.	Total Arsenic (As)	IS 3025(Part 2): 2004	ICP Method	0.005 mg/L
37.	Lead (Pb)	IS 3025(Part 2): 2004	ICP Method	0.008 mg/L
38.	Cadmium (Cd)	IS 3025(Part 2): 2004	ICP Method	0.002 mg/L
39.	Mercury (Hg)	IS 3025(Part 2): 2004	ICP Method	0.0008 mg/L
40.	Manganese (Mn)	IS 3025(Part 2): 2004	ICP Method	0.02 mg/L
41.	Iron (Fe)	IS 3025(Part 2): 2004	ICP Method	0.06 mg/L
42.	Vanadium (V)	IS 3025(Part 2): 2004	ICP Method	0.05 mg/L
43.	Selenium (Se)	IS 3025(Part 2): 2004	ICP Method	0.005 mg/L

Sr.	Parameters	Methods References	Techniques	Detection Limit
44.	Boron (B)	IS 3025(Part 2): 2004	ICP Method	0.1 mg/L
45.	Total Coliforms	APHA, 22 nd Ed., 2012,9221-B, 9-66	Multiple tube fermentation technique (MPN/100ml)	1.1 MPN/100ml
46.	Faecal Coliforms	APHA, 22 nd Ed., 2012,9221-E, 9-74	Multiple tube fermentation technique (MPN/100ml)	1.1 MPN/100ml
47.	Bioassay (Zebra Fish) Test	IS 6582, 1971, Reaffirmed 1987	Static Technique	-

Annexure IV: National Ambient Air Quality Standards, 2009

The Gazette of India

EXTRAORDINARY PART III-Section 4 PUBLISHED BY AUTHORITY
NEW DELHI, WEDNESDAY, **NOVEMBER 18, 2009** No. B-29016/20/90/PCI-I

National Ambient Air Quality Standards: Central Pollution Control Board

In exercise of the powers conferred by Sub-section (2) (h) of section 16 of the Air (Prevention and Control of Pollution) Act, 1981 (Act No.14 of 1981), and in suppression of the Notification No(s). S.O.384(E), dated 11th April, 1994 and S.O.935(E), dated 14th October, 1998, the **Central Pollution Control Board** hereby notify the National Ambient Air Quality Standards **with immediate effect**, namely:

Sr. No.	Pollutant	Time Weighted Average	Concentration in Ambient Air		
			Industrial, Residential, Rural and Other Areas	Ecologically Sensitive Areas (Notified by Central Government)	Methods of Measurement
(1)	(2)	(3)	(4)	(5)	(6)
1	Sulphur Dioxide (SO ₂) $\mu\text{g}/\text{m}^3$	Annual *	50	20	– Improved West and Gaeke – Ultraviolet fluorescence
		24 hours **	80	80	
2	Nitrogen Dioxide (NO ₂) $\mu\text{g}/\text{m}^3$	Annual *	40	30	– Modified Jacob & Hochheiser (Na-Arsenite) – Chemiluminescence
		24 hours **	80	80	
3	Particulate Matter (size less than 10 μm) or PM ₁₀ $\mu\text{g}/\text{m}^3$	Annual *	60	60	– Gravimetric – TOEM – Beta attenuation
		24 hours **	100	100	
4	Particulate Matter (size less than 2.5 μm) or PM _{2.5} $\mu\text{g}/\text{m}^3$	Annual *	40	40	– Gravimetric – TOEM – Beta attenuation
		24 hours **	60	60	
5	Ozone (O ₃) $\mu\text{g}/\text{m}^3$	8 hours **	100	100	– UV photometric – Chemiluminescence – Chemical Method
		1 hour **	180	180	
6	Lead (Pb) $\mu\text{g}/\text{m}^3$	Annual *	0.50	0.50	– AAS/ICP method after sampling on EPM 2000 or equivalent filter paper – EDXRF using Teflon filter
		24 hours **	1.0	1.0	
7	Carbon Monoxide (CO) mg/m^3	8 hours **	02	02	– Non Dispersive Infra Red (NDIR) spectroscopy
		1 hour **	04	04	
8	Ammonia (NH ₃) $\mu\text{g}/\text{m}^3$	Annual *	100	100	– Chemiluminescence – Indophenol blue method
		24 hours **	400	400	
9	Benzene (C ₆ H ₆) $\mu\text{g}/\text{m}^3$	Annual *	05	05	– Gas Chromatography based continuous analyzer – Adsorption and Desorption followed by GC analysis
10	Benzo (a) Pyrene (BaP) – particulate phase only, ng/m^3	Annual *	01	01	– Solvent extraction followed by HPLC/GC analysis
11	Arsenic (As) ng/m^3	Annual *	06	06	– AAS/ICP method after sampling on EPM 2000 or equivalent filter paper.
12	Nickel (Ni) ng/m^3	Annual *	20	20	– AAS/ICP method after sampling on EPM 2000 or equivalent filter paper.

* Annual arithmetic mean of minimum 104 measurements in a year at a particular site taken twice a week 24 hourly at uniform intervals.

** 24 hourly or 08 hourly monitored values, as applicable, shall be complied with 98% of the time in a year. 2 % of the time, they may exceed the limits but not on two consecutive days of monitoring.

Note: Whenever and wherever monitoring results on two consecutive days of monitoring exceed the limits specified above for the respective category, it shall be considered adequate reason to institute regular or continuous monitoring and further investigation.

SANT PRASAD GAUTAM, Chairman, Central Pollution Control Board [ADVT-III/4/184/09/Exty.]

Note: The notifications on National Ambient Air Quality Standards were published by the Central Pollution Control Board in the Gazette of India. Extraordinary vide notification No(s). S.O. 384(E), dated 11th April, 1994 and S.O. 935(E), dated 14th October, 1998.

$\mu\text{g}/\text{m}^3$: micro-gram/ m^3 i.e. $10^{-6}\text{gm}/\text{m}^3$

ng/m^3 : nano-gram/ m^3 i.e. $10^{-9}\text{gm}/\text{m}^3$

Annexure V: General Standards for Discharge of Environmental Pollutants, Part A: Effluents (The Environment (Protection) Rules, 1986, Schedule VI)

Sr.	Parameter	Standards			
		Inland surface Water	Public Sewers	Land for Irrigation	Marine Coastal Areas
1.	Colour and Odour	See Note 1	--	See Note I	See Note 1
2.	Suspended solids, mg/L, Max.	100	600	200	a. For process waste water - 100 b. For cooling water effluent- 10 percent above total suspended matter of influent cooling water.
3.	Particle size of suspended solids	Shall pass 850 micron IS Sieve			a. Floatable solids, Max 3 mm b. Settleable solids Max 850 microns
4.	Dissolved solids (Inorganic), mg/L, Max.	2100	2100	2100	--
5.	pH value	5.5 -9.0	5.5 -9.0	5.5 -9.0	5.5-9.0

Sr.	Parameter	Standards			
		Inland surface Water	Public Sewers	Land for Irrigation	Marine Coastal Areas
6.	Temperature °C, Max	Shall not exceed 40 in any section of the stream within 15 mts. Downstream from the effluent outlet	45 at the point of discharge	--	45 at the point of discharge
7.	Oil and Grease, mg/L, Max	10	20	10	20
8.,	Total Residual chlorine, mg/L, Max	1.0	--	--	1.0
9.	Ammonical Nitrogen (as N), mg/L, Max	50	50	--	50
10.	Total Kjeldahl Nitrogen (as N), mg/L, Max.	100	--	--	100
11.	Free Ammonia (as NH ₃), mg/L, Max	5.0	--	--	5.0
12.	Biochemical oxygen demand (5 days, at 20° c) mg/L, Max	30	350	100	100
13.	Chemical oxygen demand, mg/L, Max	250	--	--	250
14.	Arsenic (as As), mg/l, Max	0.2	0.2	0.2	0.2
15.	Mercury (as Hg). Mg/L, Max	0.01	0.01	--	0.01
16.	Lead (as Pb), mg/L, Max	0.1	1.0	-	1.0
17.	Cadmium (as Cd), mg/L,	2.0	1.0	--	2.0

Sr.	Parameter	Standards			
		Inland surface Water	Public Sewers	Land for Irrigation	Marine Coastal Areas
18.	Hexavalent Chromium (as Cr ⁺⁶) mg/L, Max	.1	2.0	--	1.0
19.	Total Chromium (as Cr), mg/L, Max	2.0	2.0	--	2.0
20.	Copper (as Cu), mg/L, Max.	3.0	3.0	--	3.0
21.	Zinc (as Zn), mg/L, Max.	5.0	15	0--	15
22	Selenium (as Se), mg/l, Max.	0.05	0.05	--	0.05
23	Nickel (as Ni), mg/l, Max.	3.0	3.0	--	5.0
24	Boron (as B), mg/l, Max.	2.0	2.0	2.0	--
25.	Percent Sodium, Max.	--	60	60	--
26.	Residual Sodium carbonate, mg/l, Max.	--	--	5.0	--
27.	Cyanide (as Cn), mg/L, Max.	0.2	2.0	0.2	0.2
28.	Chloride (as Cl), mg/L, Max.	1000	1000	600	--
29.	Fluoride (as F), mg/IL, Max.	2.0	15	--	15
30.	Dissolved Phosphate (as P), mg/L, Max.	5.0	--	--	--
31.	Sulphate (as SO ₄), mg/L, Max.	1000	1000	1000	--
32.	Sulphide (as S), mg/L, Max.	2.0	--	--	5.0

Sr.	Parameter	Standards			
		Inland surface Water	Public Sewers	Land for Irrigation	Marine Coastal Areas
33.	Pesticides	Absent	Absent	Absent	Absent
34.	Phenolic compounds (as C ₆ H ₅ OH), mg/L, Max.	1.0	5.0	--	5.0
35.	Radioactive materials:				
	a. Alpha emitters MC/ml., Max.	10 ⁻⁷	10 ⁻⁷	10 ⁻⁸	10 ⁻⁷
	b. Beta emitters µc/ml., Max	10 ⁻⁶	10 ⁻⁶	10 ⁻⁷	10 ⁻⁶

Annexure VI: Drinking Water Specification-IS 10500:2012

Sr.	Characteristic	Unit	Requirement (Acceptable Limit)	Permissible Limit in the Absence of Alternate Source
Table 1	Organoleptic and Physical Parameters			
1.	Colour	Hazen units	Max 5	Max 15
2.	Odour	-	Agreeable	Agreeable
3.	pH value	-	6.5-8.5	No relaxation
4.	Taste	-	Agreeable	Agreeable
5.	Turbidity	NTU	Max 1	Max 5
6.	Total dissolved solids	mg/L	Max 500	Max 2000
Table 2	General parameters concerning substances undesirable in excessive amounts			
7.	Aluminium (as Al)	mg/L	Max 0.03	Max 0.2
8.	Ammonia (as total ammonia-N)	mg/L	Max 0.5	No relaxation
9.	Anionic detergents (as MBAS)	mg/L	Max 0.2	Max 1.0
10.	Barium (as Ba)	mg/L	Max 0.7	No relaxation
11.	Boron (as B)	mg/L	Max 0.5	Max 1.0
12.	Calcium (as Ca)	mg/L	Max 75	Max 200
13.	Chloramines (as Cl ₂)	mg/L	Max 4.0	No relaxation
14.	Chlorides (as Cl)	mg/L	Max 250	Max 1000
15.	Copper (as Cu)	mg/L	Max 0.05	Max 1.5
16.	Fluoride (as F)	mg/L	Max 1.0	Max 1.5
17.	Free residual chlorine	mg/L	Min 0.2	Min 1

Sr.	Characteristic	Unit	Requirement (Acceptable Limit)	Permissible Limit in the Absence of Alternate Source
18.	Iron (as Fe)	mg/L	Max 0.3	No relaxation
19.	Magnesium (as Mg)	mg/L	Max 30	Max100
20.	Manganese (as Mn)	mg/L	Max 0.1	Max 0.3
21.	Mineral Oil	mg/L	Max 0.5	No relaxation
22.	Nitrate (as NO ₃)	mg/L	Max 45	No relaxation
23.	Phenolic compounds (as C ₆ H ₅ OH)	mg/L	Max 0.001	Max 0.002
24.	Selenium (as Se)	mg/L	Max 0.01	No relaxation
25.	Silver (as Ag)	mg/L	Max 0.1	No relaxation
26.	Sulphate (as SO ₄)	mg/L	Max 200	Max 400
27.	Sulphide (as H ₂ S)	mg/L	Max 0.05	No relaxation
28.	Total Alkalinity as calcium carbonate	mg/L	Max 200	Max600
29.	Total hardness (as CaCO ₃)	mg/L	Max 200	Max 600
30.	Zinc (as Zn)	mg/L	Max 5	Max15
Table 3	Parameters Concerning Toxic Substances			
31.	Cadmium (asCd)	mg/L	Max 0.003	No relaxation
32.	Cyanide (asCN)	mg/L	Max 0.05	No relaxation
33.	Lead (as Pb)	mg/L	Max 0.01	No relaxation
34.	Mercury (asHg)	mg/L	Max 0.001	No relaxation
35.	Molybdenum (as Mo)	mg/L	Max 0.07	No relaxation
36.	Nickel (as Ni)	mg/L	Max 0.02	No relaxation
37.	Pesticides	mg/L	See Table 5	No relaxation
38.	Polychlorinatedbiphenyls	mg/L	Max 0.0005	No relaxation

Sr.	Characteristic	Unit	Requirement (Acceptable Limit)	Permissible Limit in the Absence of Alternate Source
39.	Poly nuclear aromatic Hydrocarbons (as PAH)	mg/L	Max 0.0001	No relaxation
40.	Total Arsenic(as As)	mg/L	Max 0.01	Max0.05
41.	Total Chromium (as Cr)	mg/L	Max 0.05	No relaxation
42.	Trihalomethanes			
a)	Bromoform	mg/L	Max 0.1	No relaxation
b)	DibromochloroMethane	mg/L	Max 0.1	No relaxation
c)	Bromodichloromethane	mg/L	Max 0.06	No relaxation
d)	Chloroform	mg/L	Max 0.2	No relaxation
Table 4	Parameters Concerning Radioactive Substances			
43.	Radioactive Materials			
a)	Alpha emitters	Bq/L	Max 0.1	No relaxation
b)	Beta emitters	Bq/L	Max 1.0	No relaxation
Table 5	Pesticide Residues Limits and Test Method			
i)	Alachor	µg/L	20	No relaxation
ii)	Atrazine	µg/L	2	No relaxation
iii)	Aldrin/ Dieldrin	µg/L	0.03	No relaxation
iv)	Alpha HCH	µg/L	0.01	No relaxation
v)	Beta HCH	µg/L	0.04	No relaxation
vi)	Butachlor	µg/L	125	No relaxation
vii)	Chlorpyriphos	µg/L	30	No relaxation
viii)	Delta HCH	µg/L	0.04	No relaxation
ix)	2,4- Dichlorophenoxyacetic acid	µg/L	30	No relaxation

Sr.	Characteristic	Unit	Requirement (Acceptable Limit)	Permissible Limit in the Absence of Alternate Source
x)	DDT (o,p&p,p — Isomers of DDT, DDE and DDD)	µg/L	1	No relaxation
xi)	Endosulfan (α,β & sulphate)	µg/L	0.4	No relaxation
xii)	Ethion	µg/L	3	No relaxation
xiii)	Gamma - HCH (Lindane)	µg/L	2	No relaxation
xiv)	Isoproturon	µg/L	9	No relaxation
xv)	Malathion	µg/L	190	No relaxation
xvi)	Methyl parathion	µg/L	0.3	No relaxation
xvii)	Monocrotophos	µg/L	1	No relaxation
xviii)	Phorate	µg/L	2	No relaxation
Table 6	Bacteriological Quality of Drinking Water			
44.	E.coli or thermotolerant coliform bacteria	/100	Not detectable	-
45.	Total coliform bacteria	/100 mL	Not detectable	-
	Virological Requirements			
46.	MS2 phage	/1 L	Absent	-
	Biological Requirements			
47.	Cryptosporidium	/10 L	Absent	-
48.	Giardia	/10 L	Absent	-
49.	Microscopic organisms such as algae,zooplanktons,flagellate s,parasites and toxin producing organisms		Free from microscopic organisms	-

Annexure VII: CPCB Water Quality Criteria:

Designated best use	Quality Class	Primary Water Quality Criteria
Drinking water source without conventional treatment but with chlorination	A	<ul style="list-style-type: none"> ➤ Total coliform organisms (MPN*/100 ml) shall be 50 or less ➤ pH between 6.5 and 8.5 ➤ Dissolved Oxygen 6 mg/L or more, and ➤ Biochemical Oxygen Demand 2 mg/L or less
Outdoor bathing (organized)	B	<ul style="list-style-type: none"> ➤ Total coliform organisms (MPN/100 ml) shall be 500 or less ➤ pH between 6.5 and 8.5 ➤ Dissolved Oxygen 5 mg/L or more, and ➤ Biochemical Oxygen Demand 3 mg/L or less
Drinking water source with conventional treatment	C	<ul style="list-style-type: none"> ➤ Total coliform organisms (MPN/100ml) shall be 5000 or less ➤ pH between 6 and 9 ➤ Dissolved Oxygen 4 mg/L or more, and ➤ Biochemical Oxygen Demand 3 mg/L or less
Propagation of wildlife and fisheries	D	<ul style="list-style-type: none"> ➤ pH between 6.5 and 8.5 ➤ Dissolved Oxygen 4 mg/L or more, and ➤ Free ammonia (as N) 1.2 mg/L or less
Irrigation, industrial cooling, and controlled disposal	E	<ul style="list-style-type: none"> ➤ pH between 6.0 and 8.5 ➤ Electrical conductivity less than 2250 micro mhos/cm, ➤ Sodium Absorption Ratio less than 26, ➤ and Boron less than 2 mg/l.
	Below E	<ul style="list-style-type: none"> ➤ Not Meeting A, B, C, D & E Criteria

Annexure VIII: Water Quality Parameters Requirements and Classification

Water quality parameters are classified into three categories, given in Table (i), (ii) and (iii) (Source: CPCB, 2002, "Water Quality Criteria and Goals", Monitoring of Indian National aquatic Resources Series: MINARS/17/2001-2002).

Table: Basic Water Quality Requirement and Classification (Surface Water + Ground Water)

i) Simple Parameters:

Sr.	Parameters	Requirement for Waters of Class		
		A-Excellent	B-Desirable	C-Acceptable
(i)	Sanitary Survey	Very Clean neighborhood and catchment	Reasonably clean neighborhood	Generally clean neighborhood
(ii)	General Appearance	No floating matter	No floating matter	No floating matter
(iii)	Colour	Absolutely Colourless	Almost colourless, very light shade if any	No colour of anthropogenic origin
(iv)	Smell	Odourless	Almost odourless	No unpleasant odour
(v)	Transparency	>1.0 depth	>0.5 to 0.1m depth	>0.2 to 0.5 m depth
(vi)	Ecological* (Presence of Animals)	Fish & Insects	Fish & Insects	Fish & Insects

* Applicable to only surface water

ii) Regular Monitoring Parameters:

Sr.	Parameters	Requirement for Waters of Class		
		A Excellent	B-Desirable	C-Acceptable
(i)	pH	7.0 to 8.5	6.5 to 9.0	6.5 to 9.0
(ii)	DO (% Saturation)	90-110	80-120	60-140
(iii)	BOD, mg/l	Below 2	Below 5	Below 8
(iv)	EC, μ mhos/cm	<1000	<2250	<4000
(v)	(NO ₂ +NO ₃)-Nitrogen, mg/l	<5	<10	<15
(vi)	Suspended solid, mg/l	<25	<50	<100

Sr.	Parameters	Requirement for Waters of Class		
		A Excellent	B-Desirable	C-Acceptable
(vii)	Fecal Coliform, MPN/ 100 ml	<20 per 100 ml	<200 per 100 ml	<2000 per 100 ml
(viii)	Bio-assay (Zebra Fish)	No death in 5 days	No death in 3 days	No death in 2 days

Note:

1. Dissolved Oxygen (DO) not applicable for ground waters.
2. Dissolved Oxygen in eutrophicated waters should include measurement for diurnal variation.
3. Suspended solid limit is applicable only during non-monsoon period.
4. Faecal Coliform values should meet for 90% times.
5. Static Bio-Assay method may be adopted.

iii) Specific Parameters: (Only in case of need/apprehensions)

Sr.	Parameters	Requirement for Waters of Class		
		A- Excellent	B-Desirable	C-Acceptable
(i)	Total Phosphorous	<0.1 mg/l	< 0.2 mg/l	< 0.3 mg/l
(ii)	T.K.N	< 1.0 mg/l	<2.0 mg/l	<3.0 mg/l
(iii)	Total Ammonia (NH ₄ + NH ₃)-Nitrogen	< 0.5 mg/l	< 1.0 mg/l	< 1.5 mg/l
(iv)	Phenols	< 2µg/l	< 5µg/l	<10 µg/l
(v)	Surface Active Agents	<20 µg/l	<100µg/l	< 200µg/l
(vi)	Organo Chlorine Pesticides	< 0.05µg/l	< 0.1µg/l	< 0.2µg/l
(vii)	PAH	< 0.05µg/l	<0.1 µg/l	<0.2 µg/l
(viii)	PCB and PCT	< 0.01µg/l	< 0.01µg/l	< 0.02µg/l
(ix)	Zinc	< 100µg/l	< 200µg/l	<300 µg/l
(x)	Nickel	< 50µg/l	< 100µg/l	< 200µg/l
(xi)	Copper	< 20µg/l	< 50µg/l	<100µg/l

Sr.	Parameters	Requirement for Waters of Class		
		A- Excellent	B-Desirable	C-Acceptable
(xii)	Chromium (Total)	< 20µg/l	< 50µg/l	< 100µg/l
(xiii)	Arsenic (Total)	< 20µg/l	<50 µg/l	<100 µg/l
(xiv)	Lead	< 20µg/l	< 50µg/l	< 100µg/l
(xv)	Cadmium	< 1.0µg/l	<2.5 µg/l	< 5.0µg/l
(xvi)	Mercury	< 0.2µg/l	< 0.5µg/l	< 1.0µg/l